



Data Sheet | Item Number: 267-422

Conductor support, base; with direct ground contact; with snap-in mounting feet; 7-pole; 2,50 mm²; white

<https://www.wago.com/267-422>

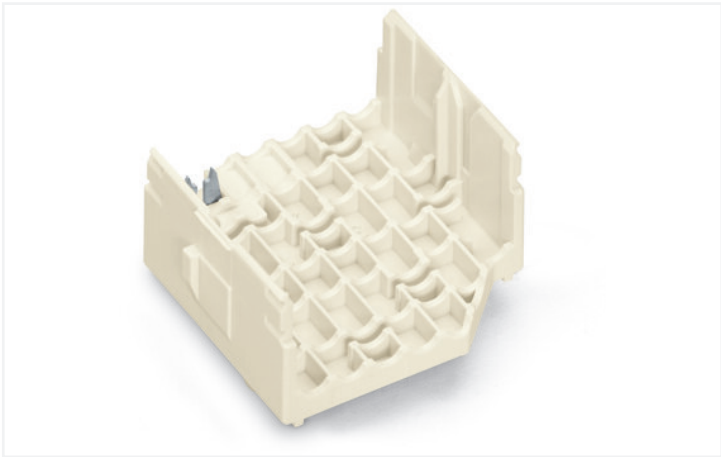

Color: white

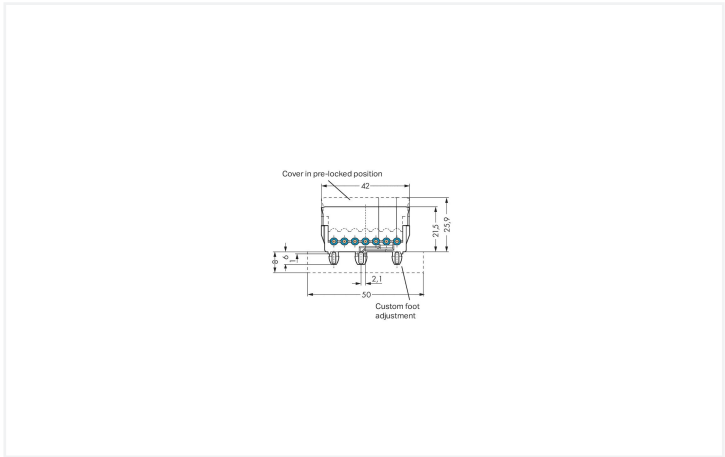

Dimensions in mm

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated surge voltage	-	4 kV	-
Rated current	-	6 A	-

Connection data

Number of connection types	1	Connection 1	
Number of levels	1	Connection technology	IDC connection
		Solid conductor	1.5 ... 2.5 mm²

Material data

Note (material data)	Information on material specifications can be found here		
Color	white		
Material group	I		
Insulation material	Polyamide (PA66)		
Flammability class per UL94	V2		
Clamping spring material	Chrome-nickel spring steel (CrNi)		
Contact material	Electrolytic copper (E _{Cu})		
Contact plating	Tin		
Fire load	0.143 MJ		
Weight	5.5 g		



Environmental requirements	
Temperature stability	105 °C

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4055143369510
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61984	NL-47718
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-100641
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 267-422	



Documentation

Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	