




Color: ■ black

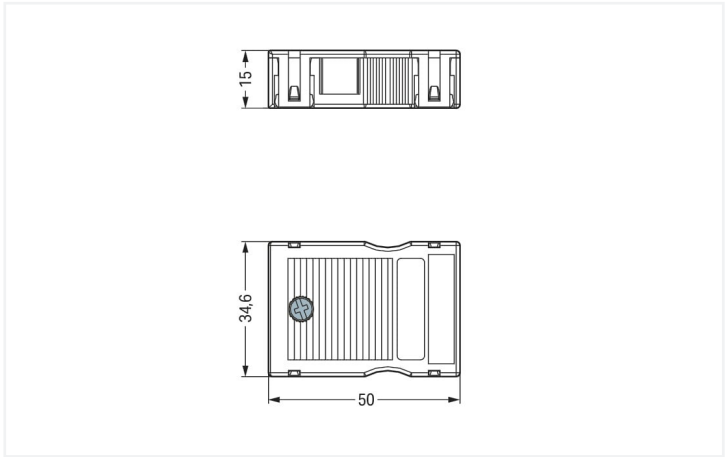

Dimensions in mm

Strain relief housing *WINSTA®* MIDI 3-pole

Implement your installation project with ease: The strain relief housing from the *WINSTA®* MIDI product line is the product of your choice for quick, straightforward installation. You can rely on the level of quality of *WINSTA®* components from WAGO for your electrical installation accessories too. Our *WINSTA®* MIDI product line allows total flexibility for the installation of applications. Through its Push-in *CAGE CLAMP®* spring pressure connection technology, it guarantees error-free, time-saving installation and offers customization for meeting an enormous variety of installation requirements. A range up to 55 mm can be used for the strip length.

Push-in *CAGE CLAMP®* spring pressure connection technology – pluggable installation instead of laborious screw connections!

The *WINSTA®* Pluggable Connection System is ideally tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus faster, even more reliable, and error-free. Using this pre-assembled system reduces assembly times and errors during installation at the construction site. Choose durability and quality – with protection against mismatching from WAGO makes the installation of electrical components noticeably easier.

- simple circuits
- rapid, structured electrical installation

Connection data

Connection 1	
Pole number	3
Connectable sheathed cable diameter	8 ... 11.5 mm
Strip length (outer insulation)	55 mm

Physical data

Width	34.6 mm / 1.362 inches
Height	15 mm / 0.591 inches
Depth	50 mm / 1.969 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.274 MJ
Weight	9.9 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332753876
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
			 		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6
cURus Underwriters Laboratories Inc.	UL 1059	E 45172	LR Lloyds Register	IEC 61984	LR22429487TA



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 770-503			↓

Documentation			
Bid Text			
770-503	19.02.2019	xml 2.74 KB	↓
770-503	12.03.2015	doc 23.50 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 770-503	EPLAN Data Portal 770-503
↓	↓
	WSCAD Universe 770-503
	↓
	ZUKEN Portal 770-503
	↓

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip



[Item No.: 210-333](#)
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white