



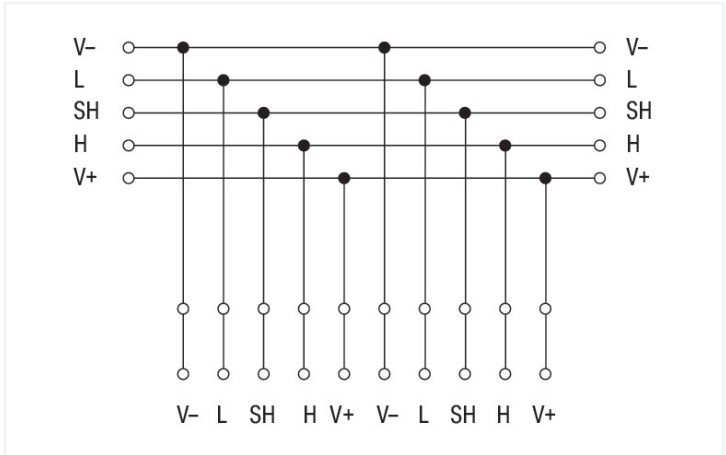

Similar to illustration

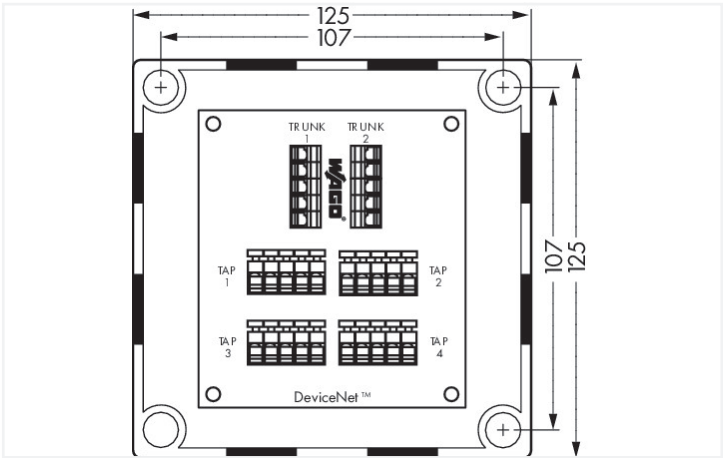

Dimensions in mm

For DeviceNet, a terminating resistor must be connected to each end of the trunk cable. A metal film resistor with the following values must be used: 121 Ohm $\pm$ 1 %, 1/4 W. Do not connect terminating resistors to the end of a drop cable, only connect to the ends of the trunk cable.

Connection data	
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Connectable sheathed cable diameter	6 ... 14 mm
Connection point (other) designation	Trunk cables Drop cables
Connection point (other) connection technology	CAGE CLAMP® CAGE CLAMP®

Physical data	
Width	125 mm / 4.921 inches
Depth	125 mm / 4.921 inches



Material data	
Fire load	0.632 MJ
Weight	418.8 g
Housing	with cable entry holes
Housing protection type	IP65/NEMA 4

Commercial data	
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-44-32
ETIM 8.0	EC000635
ETIM 7.0	EC000635
PU (SPU)	1 pcs
Packaging type	Foil
Country of origin	US
GTIN	4050821750451
Customs tariff number	85369010000

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 810-900/000-001	

Documentation

Bid Text			
810-900/000-001	19.02.2019	xml 3.65 KB	
810-900/000-001	05.03.2019	docx 16.57 KB	

CAD/CAE-Data

CAE data	
WSCAD Universe 810-900/000-001	