

incandescent lamp, 230 V AC, 5 W, Base BA 15d, accessory for signaling columns, with diameters 50 mm + 70 mm, (Packing unit 10 units)



|                                                      |  |                   |                   |
|------------------------------------------------------|--|-------------------|-------------------|
| product brand name                                   |  | SIRIUS            |                   |
| product designation                                  |  | Incandescent lamp |                   |
| General technical data                               |  |                   |                   |
| type of voltage of the operating voltage             |  | AC                |                   |
| operating voltage                                    |  |                   |                   |
| • 1 at AC at 50 Hz rated value                       |  | 230 V             |                   |
| • 1 at AC at 60 Hz rated value                       |  | 230 V             |                   |
| relative positive tolerance of the operating voltage |  | 10 %              |                   |
| relative negative tolerance of the operating voltage |  | -10 %             |                   |
| reference code according to EN 61346-2               |  | P                 |                   |
| Lamp                                                 |  |                   |                   |
| type of light source                                 |  | filament lamp     |                   |
| socket design                                        |  | BA 15d            |                   |
| Enclosure                                            |  |                   |                   |
| height                                               |  | 42 mm             |                   |
| width                                                |  | 16 mm             |                   |
| outer diameter of the signal column element          |  | 70 mm             |                   |
| Ambient conditions                                   |  |                   |                   |
| ambient temperature during operation                 |  | -20 ... +50 °C    |                   |
| Approvals Certificates                               |  |                   |                   |
| General Product Approval                             |  | EMV               | Marine / Shipping |

[Confirmation](#)



|                              |                                             |
|------------------------------|---------------------------------------------|
| other                        | Environment                                 |
| <a href="#">Confirmation</a> | <a href="#">Environmental Confirmations</a> |

|                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Further information                                                                                                                                                                                                 |
| Information on the packaging<br><a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>                                             |
| Information- and Downloadcenter (Catalogs, Brochures,...)<br><a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>                                                                                |
| Industry Mall (Online ordering system)<br><a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4358-1XX">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WD4358-1XX</a> |

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=8WD4358-1XX>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WD4358-1XX>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=8WD4358-1XX&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=8WD4358-1XX&lang=en)

**-P**

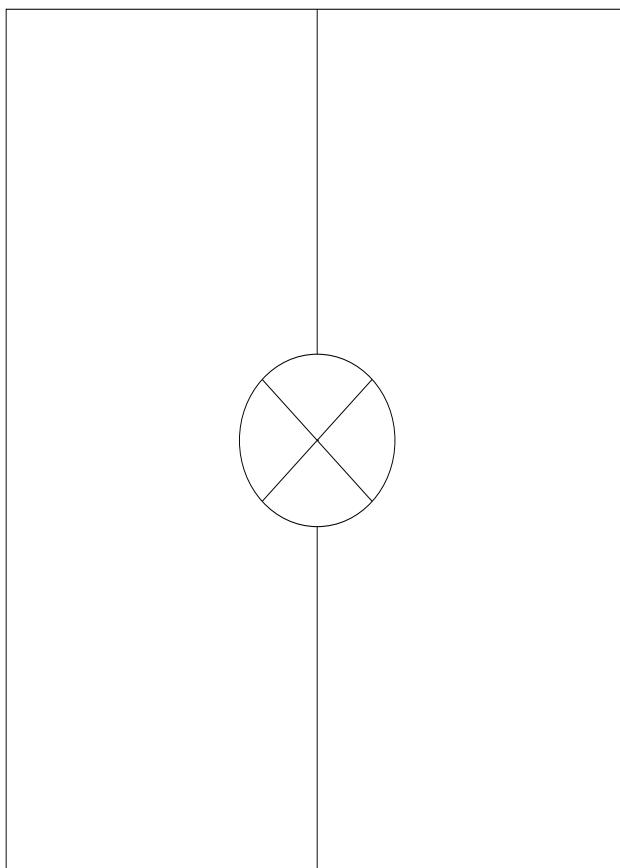

last modified:

12/23/2020 