

Combination arrester type 1+2 Requirement class B+C, UC 350V Pluggable protective modules 4-pole, 3+1 circuit for TN-S and TT systems with remote display



General data	
standard	IEC 61643-11: 2011, EN 61643-11: 2012
product designation	Surge protection device
SPD classification / according to EN 61643-11	
• Test Class I, Type 1	Yes
• Test Class II, Type 2	Yes
• Test Class III, Type 3	No
number of SPD ports	1
design of the product	Arrester combination
design of pole	3+N/PE
designation of the protective paths	L-N, L-PE, N-PE
accessories	3 x 5SD7428-1 + 1 x 5SD7418-0 + 3 x 5SD7448-1
fastening method	DIN rail NS 35
material / of the enclosure	PBT
degree of pollution	2
overvoltage category / according to IEC 61010-1	III
protection class IP / at connection all terminals	IP20
shock acceleration	25 gn
vibrational acceleration / at 5 Hz ... 500 Hz / limited to 2,5 h / per axis	5 gn
relative humidity / during operation	5 ... 95 %
installation altitude / at height above sea level / maximum	2 000 m
width	142.8 mm
height	95 mm
depth	71.5 mm
net weight	1 236 g
Electrical data	
type of distribution system	TT, TN-S
operating voltage	
• at AC	230 V
value range / of the operating frequency	50 / 60 Hz
continuous operating voltage	
• at AC / maximum	350 V
• between N and PE / at AC / maximum	350 V
• between L and (PE)N / at AC / maximum	350 V
apparent power consumption / maximum	300 mVA
discharge current	
• between L and (PE)N / at (8/20) µs	25 kA
• between L and PE / at (8/20) µs	25 kA
• between N and PE / at (8/20) µs	100 kA

lightning current peak value / at (10/350) μs	
• lightning current peak value / between L and PE	25 kA
• lightning current peak value / between N and PE	100 kA
• lightning current peak value / between L and N	25 kA
charge of the flash / at (10/350) μs	
• charge of the flash / between L and N	12.5 A-s
• charge of the flash / between L and PE	12.5 A-s
• charge of the flash / between N and PE	50 A-s
specific energy of the flash / at (10/350) μs	
• between L and N	160
• between L and PE	160
• between N and PE	2 500
follow current extinguishing capability	
• between N and PE	100 A (350 V AC)
• between L and N	25 kA (264 V AC), 3 kA (350 V AC)
short-circuit rating (SCCR) / at 264 V	25 kA
protection level	
• between L and N / maximum	1.5 kV
• between L and PE / maximum	2.2 kV
• between N and PE / maximum	1.5 kV
residual voltage	
• between L and (PE)N	
— at rated value of discharge current / maximum	1.5 kV
— at 10 kA / maximum	1.2 kV
— at 5 kA / maximum	1 kV
— at 3 kA / maximum	0.9 kV
• between L and PE	
— at rated value of discharge current / maximum	2.2 kV
— at 10 kA / maximum	2 kV
— at 5 kA / maximum	1.8 kV
— at 3 kA / maximum	1.6 kV
• between N and PE	
— at rated value of discharge current / maximum	1.5 kV
— at 10 kA / maximum	1 kV
— at 5 kA / maximum	0.9 kV
— at 3 kA / maximum	0.8 kV
response value of the surge voltage / at 6 kV / at (1.2/50) μs	
• between L and N	1.5 kV
• between L and PE	2.2 kV
• between N and PE	1.5 kV
• response time / between L and (PE)N	25 ns
• response time / between N and PE	100 ns
adjustable response factor / of tripping current	1.6
fuse protection type / at V-shaped connection	125 A AC (gG)
fuse protection type / for T-connector	315 A AC (gG)
Connections/ Terminals	
type of electrical connection	Screw terminal
stripped length	18 mm
tightening torque	4.3 ... 4.7 N·m
connectable conductor cross-section	
• for finely stranded conductor	2.5 ... 25 mm ²
• for rigid conductor	2.5 ... 35 mm ²
• finely stranded	2.5 ... 25 mm ²
AWG number / as coded connectable conductor cross section	13 ... 2
design of the thread / of the connection screw	M5
signal design	Optical, remote signaling contact
Indicator/remote signaling	
product component / remote signaling contact	Yes
switching function / of the remote signaling contacts	PDT contact
operating voltage / of the remote signaling contacts / at AC	12 ... 250 V

operational current / of the remote signaling contacts / at AC	10 mA ... 1 A
connection type of remote signaling contact	M2 screw thread
connectable conductor cross-section / for remote signaling contacts / for rigid conductor	0.14 ... 1.5 mm ²
connectable conductor cross-section / for finely stranded conductor / for remote signaling contacts ...	0.14 ... 1.5 mm ²
AWG number / as coded connectable conductor cross section / for remote signaling contacts	28 ... 16
tightening torque / for remote signaling contacts	0.25 N·m
stripped length / of the cable / for remote signaling contacts	7 mm
NEMA/UL - Data	
type of surge protective device (SPD) / according to UL	4CA
type of distribution system / according to UL	3Y
type of distribution system	TT, TN-S
designation of the protective paths / according to UL	L-L, L-N, L-G, N-G
TOV behavior	
• at TOV test voltage (L-N)	415 V AC (5 s / withstand mode) / 457 V AC (120 min / safe failure mode)
• at TOV test voltage (N-PE)	1200 V (200 ms / withstand mode)
Measured Limiting Voltage (MLV)	
• between L and L	2.47 kV
• between L and Ground (GND)	1.55 kV
• between L and N	1.34 kV
• between N and Ground (GND)	1.08 kV
Maximum Continuous Operating Voltage (MCOV)	
• between L and L	528 V
• between L and Ground (GND)	528 V
• between L and N	264 V
• between N and Ground (GND)	264 V
leakage current	
• between N and Ground (GND) / according to UL / rated value	20 kA
• between L and N / according to UL / rated value	20 kA
• between L and Ground (GND) / according to UL / rated value	20 kA
• between L and L / according to UL / rated value	20 kA
AWG number / as coded connectable conductor cross section	
• according to UL	12 ... 2
• for remote signaling contacts / according to UL	30 ... 14
operating voltage / of the remote signaling contacts / according to UL	125 V
operational current / of the remote signaling contacts / at AC / according to UL	1 A
ambient temperature	
• during operation	-40 ... +80 °C
• during storage	-40 ... +80 °C
installation altitude above sea level / according to UL	6 562 ft
gross weight [lb] / according to UL	3.15 lb
net weight [lb] / according to UL	2.72 lb
combustibility class according to UL 94	V0
standards / according to UL	UL 1449 edition 4

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SD7444-1>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/5SD7444-1>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD7444-1

CAX-Online-Generator

<http://www.siemens.com/cax>

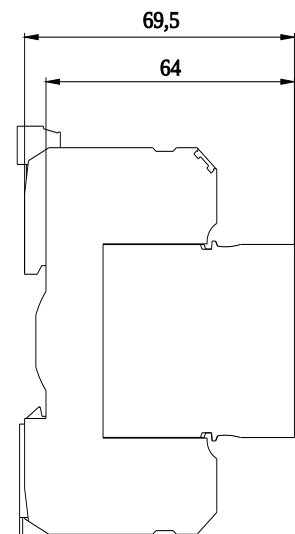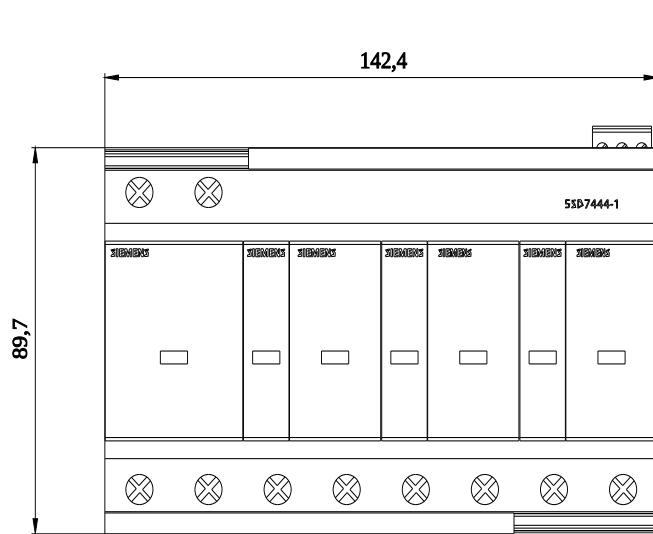

last modified:

3/12/2024 

