


Power semiconductor module 690 V, for 3RW4444/4445, 313 A two units for each device

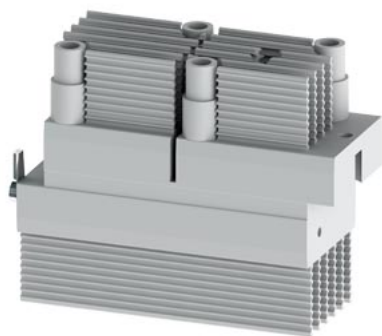

product designation		Power semiconductor module	
Substance Prohibittance (Date)		05/01/2012	
Approvals Certificates			
General Product Approval	EMV	other	Environment
Confirmation		KC	Confirmation
			Environmental Con- firmations

Further information
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4745-0LC00
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4745-0LC00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RW4745-0LC00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4745-0LC00&lang=en
Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RW4745-0LC00/char
Characteristic: Installation altitude http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW4745-0LC00&objecttype=14&gridview=view1
Simulation Tool for Soft Starters (STS) https://support.industry.siemens.com/cs/ww/en/view/101494917

last modified: 1/18/2021 

