



Auxiliary switch, Front installation 1 OE + 1 S left and / or right mountable, accessory for Load disconnecter 3LD3

| Model                                       |                                                                                                                                                                                                                          |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| product brand name                          | SETRON                                                                                                                                                                                                                   |
| product designation                         | auxiliary switch                                                                                                                                                                                                         |
| design of the product                       | accessories for 3LD3 switch disconnectors                                                                                                                                                                                |
| operational current                         | <ul style="list-style-type: none"><li>• at AC-15 at 110 V rated value 6 A</li><li>• at AC-15 at 230 V rated value 3 A</li><li>• at AC-15 at 500 V rated value 1.4 A</li><li>• at DC-13 at 24 V rated value 4 A</li></ul> |
| special product feature                     | NO: lagging during switching ON, leading during switching OFF the 3LD switch.<br>NC: leading during switching ON, lagging during switching OFF the 3LD switch                                                            |
| tightening torque with screw-type terminals | <ul style="list-style-type: none"><li>• minimum 0.8 N·m</li><li>• maximum 1.2 N·m</li></ul>                                                                                                                              |

| Approvals Certificates   |       |
|--------------------------|-------|
| General Product Approval | other |

[Confirmation](#)



[Miscellaneous](#)

[Confirmation](#)


Environment

[Environmental Con-  
firmations](#)

[Environmental Con-  
firmations](#)

Further information

Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>  
Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>  
Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3LD9340-6B>  
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/3LD9340-6B>  
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)  
[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3LD9340-6B](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3LD9340-6B)  
CAx-Online-Generator  
<http://www.siemens.com/cax>  
Tender specifications

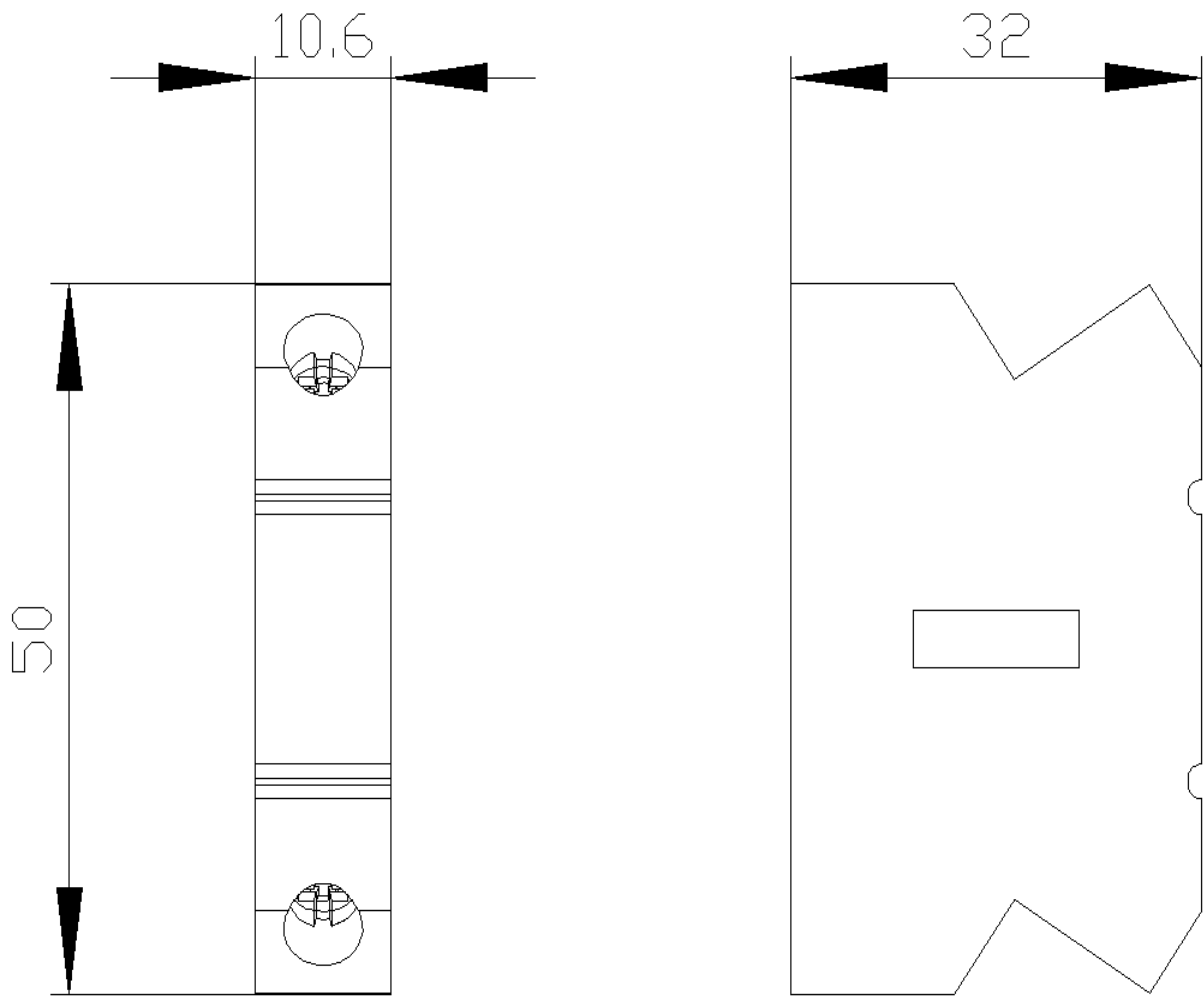

last modified:

4/18/2024 

