

Product Environmental Profile

30–100 A Double Throw F-Series Safety Switches






General information

Reference product	30–100 A Double Throw F-Series Safety Switches - DTU223RB
Description of the product	Double Throw Safety Switches are supplied for switching one load between two power sources. These switches are UL® Listed and suitable for use in accordance with Article 702 of the National Electrical Code, ANSI/NFPA 70.
Description of the range	Single product
Functional unit	Turn off all or part of an installation by separating the installation or part of the installation of all electrical energy or earth, for safety reasons with a rated voltage U, and rated current In ensuring isolation characterised by a rated voltage Ui, and if applicable the specific specifications, according to the appropriate use scenario, and during the reference service life of the product of 20 years.
Specifications are:	U = 600 V In = 100 A Ui = 2200 V IP = NEMA Type 3 R Standards - UL 98 and CSA® No.22



Constituent materials

Reference product mass	20410 g including the product, its packaging and additional elements and accessories
------------------------	--

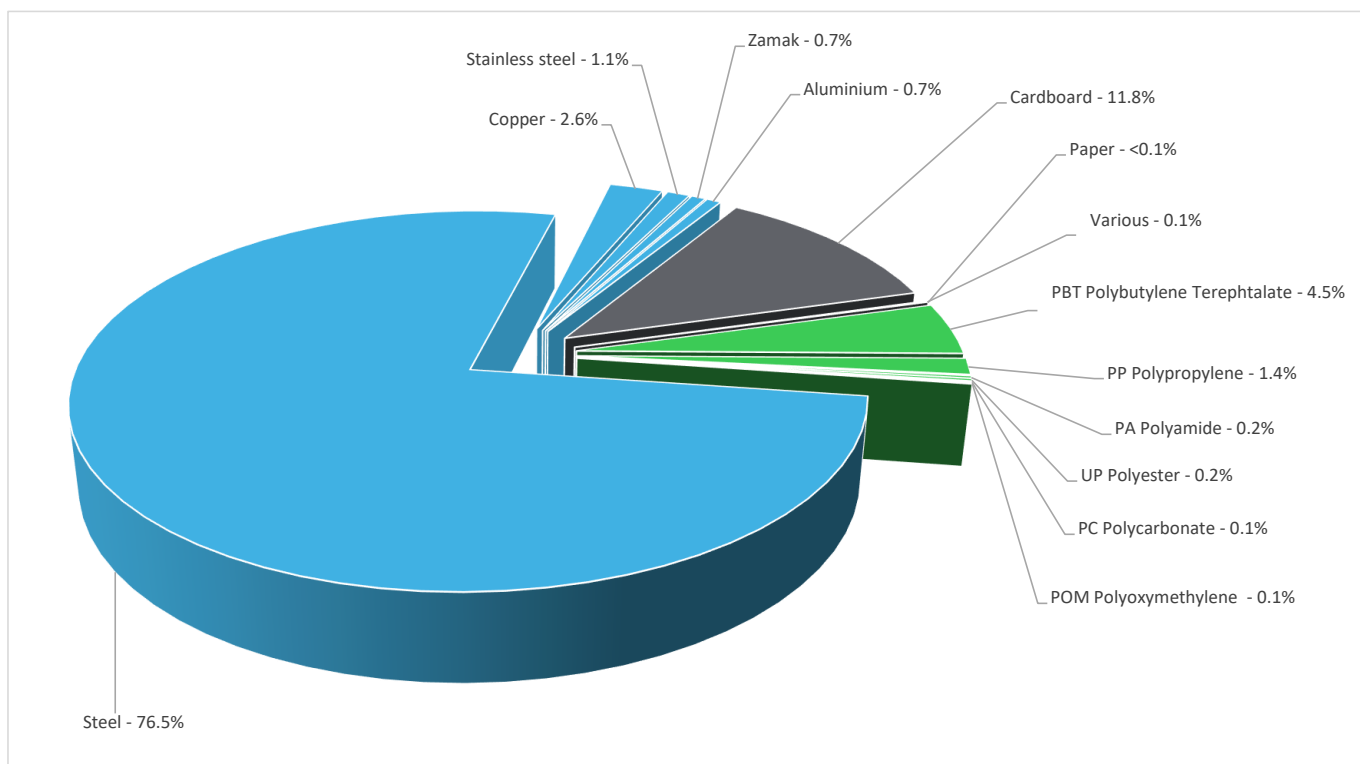

Plastics	6.50%
Metals	81.60%
Others	11.90%



Substance assessment

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<https://www.se.com/ww/en/work/support/green-premium/>

Additional environmental information

End Of Life	Recyclability potential:	96%	The recyclability rate was calculated from the recycling rates of each material making up the product with the exception of data using the ESR database. For materials or components using the ESR database or the absence of data the conservative hypothesis "0% recyclability" was used.
-------------	--------------------------	-----	---

Environmental impacts

Reference service life time	20 years			
Product category	Disconnectors - Low voltage			
Installation elements	The product does not require special installation procedure and requires little to no energy to install.			
Use scenario	Product dissipation is 16.4W full load, loading rate is 30% and service uptime percentage is 100%			
Time representativeness	The collected data are representative of the year 2024			
Technological representativeness	The Modules of Technologies such as material production, manufacturing processes and transport technology used in the PEP analysis (LCA EIME in the case) are Similar and representative of the actual type of technologies used to make the product.			
Geographical representativeness	Rest of the World			
Energy model used	[A1 - A3]	[A5]	[B6]	[C1 - C4]
	Electricity Mix; Low voltage; 2018; United States, US	Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; Low voltage; 2018; Canada, CA Electricity Mix; Low voltage; 2018; Mexico, MX	Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; Low voltage; 2018; Canada, CA Electricity Mix; Low voltage; 2018; Mexico, MX	Electricity Mix; Low voltage; 2018; United States, US Electricity Mix; Low voltage; 2018; Canada, CA Electricity Mix; Low voltage; 2018; Mexico, MX

Detailed results of the optional indicators mentioned in PCRed4 are available in the LCA report and on demand in a digital format - Country Customer Care Center - <http://www.schneider-electric.com/contact>

Mandatory Indicators			30–100 A Double Throw F-Series Safety Switches - DTU223RB					
Impact indicators	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to climate change	kg CO2 eq	3.20E+02	9.99E+01	3.93E+01	9.12E-02	1.32E+02	4.81E+01	-3.33E+01
Contribution to climate change-fossil	kg CO2 eq	3.19E+02	9.92E+01	3.93E+01	9.12E-02	1.32E+02	4.79E+01	-3.31E+01
Contribution to climate change-biogenic	kg CO2 eq	9.30E-01	6.74E-01	0*	0*	1.46E-01	1.10E-01	-2.21E-01
Contribution to climate change-land use and land use change	kg CO2 eq	3.83E-05	3.14E-05	0*	0*	0*	6.96E-06	0.00E+00
Contribution to ozone depletion	kg CFC-11 eq	4.42E-05	9.05E-06	3.45E-05	3.63E-09	5.42E-07	1.04E-07	-5.15E-06
Contribution to acidification	mol H+ eq	1.61E+00	5.81E-01	1.61E-01	1.23E-03	6.84E-01	1.77E-01	-2.75E-01
Contribution to eutrophication, freshwater	kg (PO4) ³⁻ eq	4.26E-03	7.06E-04	4.58E-06	4.52E-07	2.06E-04	3.35E-03	-5.56E-05
Contribution to eutrophication marine	kg N eq	2.64E-01	7.15E-02	7.35E-02	5.81E-04	8.18E-02	3.67E-02	-1.96E-02
Contribution to eutrophication, terrestrial	mol N eq	2.95E+00	7.81E-01	7.97E-01	5.91E-03	9.66E-01	4.04E-01	-2.28E-01
Contribution to photochemical ozone formation - human health	kg COVNM eq	9.48E-01	2.76E-01	2.66E-01	1.42E-03	2.71E-01	1.34E-01	-8.40E-02
Contribution to resource use, minerals and metals	kg Sb eq	1.59E-02	1.58E-02	3.36E-09	3.97E-09	5.74E-06	1.07E-04	-1.00E-02
Contribution to resource use, fossils	MJ	1.01E+04	3.55E+03	4.87E+02	1.05E+00	2.80E+03	3.25E+03	-7.29E+02
Contribution to water use	m3 eq	6.99E+01	4.23E+01	1.99E+00	2.16E-01	4.64E+00	2.07E+01	-1.68E+01

Inventory flows Indicators		30–100 A Double Throw F-Series Safety Switches - DTU223RB						
Inventory flows	Unit	Total (without Module D)	[A1 - A3] - Manufacturing	[A4] - Distribution	[A5] - Installation	[B1 - B7] - Use	[C1 - C4] - End of life	[D] - Benefits and loads
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.24E+02	0*	3.18E-03	7.59E-04	4.22E+02	2.85E+00	-8.74E+00
Contribution to use of renewable primary energy resources used as raw material	MJ	4.88E+01	4.88E+01	0*	0*	0*	0*	0.00E+00
Contribution to total use of renewable primary energy resources	MJ	4.73E+02	4.82E+01	3.18E-03	7.59E-04	4.22E+02	2.85E+00	-8.74E+00
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.01E+04	3.52E+03	4.87E+02	1.05E+00	2.80E+03	3.25E+03	-7.29E+02
Contribution to use of non renewable primary energy resources used as raw material	MJ	3.63E+01	3.63E+01	0*	0*	0*	0*	0.00E+00
Contribution to total use of non-renewable primary energy resources	MJ	1.01E+04	3.55E+03	4.87E+02	1.05E+00	2.80E+03	3.25E+03	-7.29E+02
Contribution to use of secondary material	kg	4.62E-02	4.62E-02	0*	0*	0*	0*	0.00E+00
Contribution to use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to net use of freshwater	m³	1.63E+00	9.85E-01	4.62E-02	5.03E-03	1.08E-01	4.83E-01	-3.92E-01
Contribution to hazardous waste disposed	kg	1.21E+03	1.21E+03	3.24E-02	5.44E-04	2.46E+00	0*	-7.99E+02
Contribution to non hazardous waste disposed	kg	1.37E+02	1.14E+02	3.98E-02	2.36E+00	1.92E+01	1.09E+00	-2.74E+01
Contribution to radioactive waste disposed	kg	3.61E-02	2.43E-02	7.78E-03	1.91E-06	3.82E-03	1.96E-04	-1.35E-02
Contribution to components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to materials for recycling	kg	1.92E+01	2.39E+00	0*	0*	0*	1.68E+01	0.00E+00
Contribution to materials for energy recovery	kg	0.00E+00	0*	0*	0*	0*	0*	0.00E+00
Contribution to exported energy	MJ	1.81E-01	2.39E-02	0*	0*	0*	1.57E-01	0.00E+00
* represents less than 0.01% of the total life cycle of the reference flow								
Contribution to biogenic carbon content of the product	kg de C	0.00E+00						
Contribution to biogenic carbon content of the associated packaging	kg de C	6.61E-01						

Mandatory Indicators		30–100 A Double Throw F-Series Safety Switches - DTU223RB							
Impact indicators	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to climate change	kg CO2 eq	1.32E+02	0*	0*	0*	0*	0*	1.32E+02	0*
Contribution to climate change-fossil	kg CO2 eq	1.32E+02	0*	0*	0*	0*	0*	1.32E+02	0*
Contribution to climate change-biogenic	kg CO2 eq	1.46E-01	0*	0*	0*	0*	0*	1.46E-01	0*
Contribution to climate change-land use and land use change	kg CO2 eq	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to ozone depletion	kg CFC-11 eq	5.42E-07	0*	0*	0*	0*	0*	5.42E-07	0*
Contribution to acidification	mol H+ eq	6.84E-01	0*	0*	0*	0*	0*	6.84E-01	0*
Contribution to eutrophication, freshwater	kg (PO4)³⁻ eq	2.06E-04	0*	0*	0*	0*	0*	2.06E-04	0*
Contribution to eutrophication marine	kg N eq	8.18E-02	0*	0*	0*	0*	0*	8.18E-02	0*
Contribution to eutrophication, terrestrial	mol N eq	9.66E-01	0*	0*	0*	0*	0*	9.66E-01	0*
Contribution to photochemical ozone formation - human health	kg COVNM eq	2.71E-01	0*	0*	0*	0*	0*	2.71E-01	0*
Contribution to resource use, minerals and metals	kg Sb eq	5.74E-06	0*	0*	0*	0*	0*	5.74E-06	0*
Contribution to resource use, fossils	MJ	2.80E+03	0*	0*	0*	0*	0*	2.80E+03	0*
Contribution to water use	m3 eq	4.64E+00	0*	0*	0*	0*	0*	4.64E+00	0*

Inventory flows Indicators		30–100 A Double Throw F-Series Safety Switches - DTU223RB							
Inventory flows	Unit	[B1 - B7] - Use	[B1]	[B2]	[B3]	[B4]	[B5]	[B6]	[B7]
Contribution to use of renewable primary energy excluding renewable primary energy used as raw material	MJ	4.22E+02	0*	0*	0*	0*	0*	4.22E+02	0*
Contribution to use of renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of renewable primary energy resources	MJ	4.22E+02	0*	0*	0*	0*	0*	4.22E+02	0*
Contribution to use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.80E+03	0*	0*	0*	0*	0*	2.80E+03	0*
Contribution to use of non renewable primary energy resources used as raw material	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to total use of non-renewable primary energy resources	MJ	2.80E+03	0*	0*	0*	0*	0*	2.80E+03	0*
Contribution to use of secondary material	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to use of non renewable secondary fuels	MJ	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to net use of freshwater	m³	1.08E-01	0*	0*	0*	0*	0*	1.08E-01	0*
Contribution to hazardous waste disposed	kg	2.46E+00	0*	0*	0*	0*	0*	2.46E+00	0*
Contribution to non hazardous waste disposed	kg	1.92E+01	0*	0*	0*	0*	0*	1.92E+01	0*
Contribution to radioactive waste disposed	kg	3.82E-03	0*	0*	0*	0*	0*	3.82E-03	0*
Contribution to components for reuse	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for recycling	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to materials for energy recovery	kg	0*	0*	0*	0*	0*	0*	0*	0*
Contribution to exported energy	MJ	0*	0*	0*	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version v6.2-6, database version 2024-04 in compliance with ISO14044, EF 3.0 method is applied, for biogenic carbon storage, assessment methodology 0/0 is used

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :	ENVPEP1307076_V2	Drafting rules	PCR-4-ed4-EN-2021 09 06
Date of issue	07-2024	Supplemented by	PSR-0005-ed3.1-EN-2023 12 08
		Information and reference documents	www.pep-ecopassport.org
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14021 : 2016			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Julie Orgelet (DDemain)			
PEPs are compliant with XP C08-100-1:2016 and EN 50693:2019 or NF E38-500 :2022			
The components of the present PEP may not be compared with components from any other program.			
Document complies with ISO 14021:2016 “Environmental labels and declarations. Type II environmental declarations”			

Schneider Electric Industries SAS
Country Customer Care Center
<http://www.se.com/contact>
35, rue Joseph Monier
CS 30323
F- 92500 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 928 298 512 €