




Similar to illustration

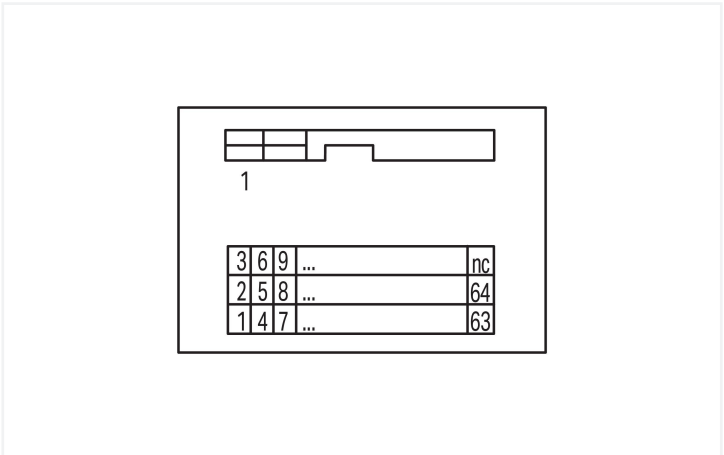

Notes	
Safety Information	Notice! Live parts can be easily touched! Protection against direct contact must be provided by the equipment manufacturer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be observed for each individual application.

Electrical data	
Operating voltage	≤ 125 VAC/VDC
Nominal current	1 A

Safety and protection	
Rated Voltage	125 V
Pollution degree	2
Protection type	IP00
Dielectric strength (channel/channel) (AC, 1 min.)	1.3 kVrms
Insulation type	Functional insulation

Connection data	
Performance level	3 / 50 mating cycles
Connection 1	
Pluggable connector	DIN 41651 connector; male connector
Pole number 1	50
Connection type 1	System
Note (conductor cross-section)	12 AWG: THHN, THWN
Mating direction	vertical

Connection 2	
Design 2	PCB terminal blocks (triple-deck)
Pole number 2	50
Connection type	Field
Connection technology	CAGE CLAMP®
WAGO connector 2	WAGO 737 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG

Connection 2	
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches



Physical data		
Width		88 mm / 3.465 inches
Height		85 mm / 3.346 inches
Depth from upper-edge of DIN-rail		62 mm / 2.441 inches

Mechanical data		
Mounting type		DIN-35 rail
Housing design		Mounting carrier

Material data		
Contact material (connector)		Au over Ni
Fire load		1.278 MJ
Weight		141.5 g

Environmental requirements		
Ambient temperature (operation)		-20 ... +55 °C
Ambient temperature (storage)		-40 ... +70 °C
Relative humidity		≤ 85 % (non-condensing)

Standards and specifications		
Standards/specifications		EN 61010-2-201

Commercial data		
Product Group		6 (INTERFACE ELECTRONIC)
eCl@ss 10.0		27-14-11-52
eCl@ss 9.0		27-14-11-52
ETIM 9.0		EC002780
ETIM 8.0		EC002780
PU (SPU)		3 (1) pcs
Packaging type		Box
Country of origin		DE
GTIN		4045454353629
Customs tariff number		85366990990

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals		
Declarations of conformity and manufacturer's declarations		

EAC		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03084

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-618

Download icon

Documentation

Bid Text

289-618

19.02.2019

xml

3.46 KB

Download icon

289-618

09.02.2015

doc

25.50 KB

Download icon

Instruction Leaflet

pdf

1246.19 KB

Download icon

CAD/CAE-Data

CAD data

2D/3D Models 289-618

Download icon

CAE data

EPLAN Data Portal 289-618

Download icon

WSCAD Universe 289-618

Download icon

ZUKEN Portal 289-618

Download icon

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 709-196
Marking strips; for laser printer; translucent



Item No.: 709-177
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178
Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.2 Tool


1.1.2.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination




Conductor termination – screwdriver actuation parallel to conductor entry




Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.