



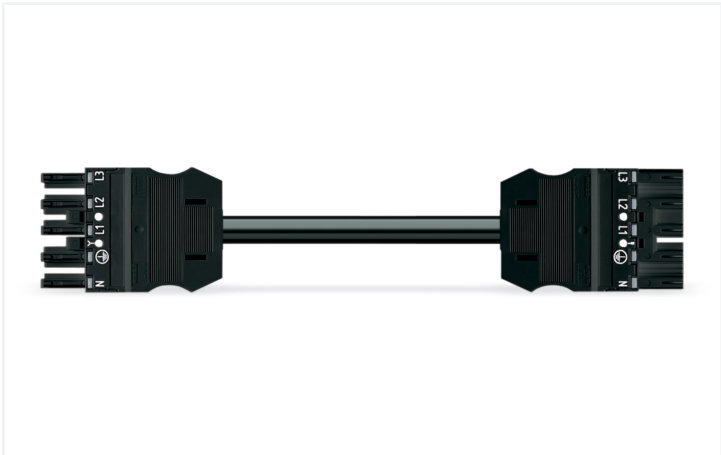

Color: ■ black

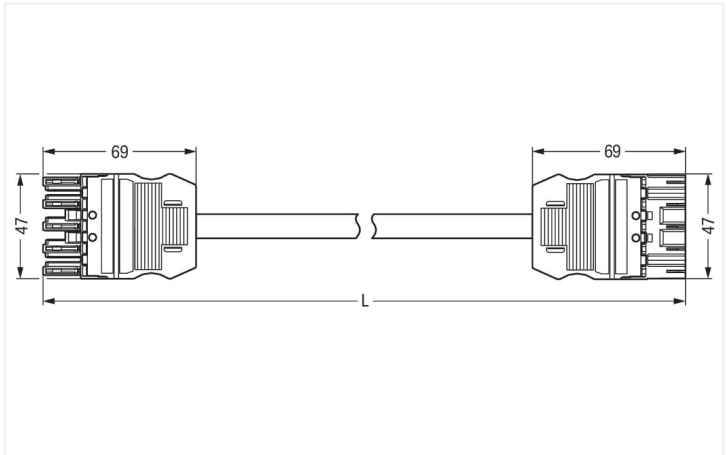

Dimensions in mm

Cable assembly WINSTA® MIDI with protection against mismatching

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MIDI cable assembly with protection type IP20. The pluggable installation connectors with spring pressure connection technology work entirely without screw connections. They allow resource-efficient, error-free installation in a large number of possible uses. For greater security in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismatching. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). Thanks to the color coding and mechanical A coding of WINSTA® MIDI pluggable installation connectors, you can clearly distinguish different circuits. This pluggable installation connector can be used for a voltage load of up to 20 A. Therefore, it can also be used for high power loads. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Thanks to the integrated test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and expense. Of course, the safety of buildings must always be ensured, even after the electrical installation has been performed. The required safety requirements in connection with EU CPR are fully satisfied by this product through fire class E.

Fast, error-free assembly thanks to cable assemblies from WAGO

A socket and a plug are provided. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with marking from WAGO.

- protection against mismatching eliminates errors
- for automation controllers
- with A coding for use in many general mains applications
- custom-engineered solutions
- fast, secure installation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data      |  |                |     |    | General information                             |  |
|----------------------|--|----------------|-----|----|-------------------------------------------------|--|
| Ratings per          |  | IEC/EN 60664-1 |     |    | Note on contact resistance                      |  |
| Overvoltage category |  | III            | III | II | approx. 1 mΩ of contact resistance              |  |
| Pollution degree     |  | 3              | 2   | 2  | approx. 0.25 mΩ contact transition plug/ socket |  |
| Nominal voltage      |  | 400 V          | -   | -  |                                                 |  |
| Rated surge voltage  |  | 6 kV           | -   | -  |                                                 |  |
| Rated current        |  | 20 A           | -   | -  |                                                 |  |

## Connection data

|                            |                      |                     |                     |
|----------------------------|----------------------|---------------------|---------------------|
| Total number of potentials | 5                    | <b>Connection 1</b> |                     |
| PE function                | Preceding PE contact | Pole number         | 5                   |
|                            |                      | Wire cross-section  | 2.5 mm <sup>2</sup> |
|                            |                      | Connection type     | Socket - Plug       |

## Physical data

|              |                         |
|--------------|-------------------------|
| Pin spacing  | 10 mm / 0.394 inches    |
| Width        | 47 mm / 1.85 inches     |
| Height       | 15.38 mm / 0.606 inches |
| Total length | 1 m                     |

## Mechanical data

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Use                                     | General mains applications                                                                                    |
| Coding                                  | A                                                                                                             |
| Variable coding                         | Yes                                                                                                           |
| Marking                                 | N ⊕ L1 L2 L3                                                                                                  |
| Potential marking                       | N ⊕ L1 L2 L3                                                                                                  |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Socket - Plug                                                                                                 |
| Type of pre-assembled cable             | Interconnecting cable                                                                                         |
| Cable type                              | H05VV-F 5G2.5                                                                                                 |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

## Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                        |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |

## Material data

|                                    |                                                                          |
|------------------------------------|--------------------------------------------------------------------------|
| Note (material data)               | <a href="#">Information on material specifications can be found here</a> |
| Color                              | black                                                                    |
| Insulation material (main housing) | Polyamide (PA66)                                                         |
| Flammability class per UL94        | V0                                                                       |
| Fire class per EN 50575            | E <sub>ca</sub>                                                          |
| Contact material                   | Copper or copper alloy; surface-treated                                  |
| Contact Plating                    | Tin                                                                      |
| Fire load                          | 30.271 MJ                                                                |
| Connector color                    | black                                                                    |
| Strain relief color                | black                                                                    |
| Printing color of strain relief    | white                                                                    |



| Material data                    |           |
|----------------------------------|-----------|
| Sheathed cable color             | black     |
| Printing color of sheathed cable | white     |
| Halogen-free                     | No        |
| Silicon-free                     | Yes       |
| Sheath material                  | PVC       |
| Rubber cable                     | No        |
| Weight                           | 278.3 g   |
| Copper weight of the pipe        | 0.12 kg/m |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 9.0              | EC002587      |
| ETIM 8.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4044918588607 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

| Approvals / Certificates                                |          |                                                            |
|---------------------------------------------------------|----------|------------------------------------------------------------|
| General approvals                                       |          | Declarations of conformity and manufacturer's declarations |
| <div><div>CCA</div><div>KEMA<br/>KEUR</div></div>       |          |                                                            |
| Approval                                                | Standard | Certificate Name                                           |
| CCA<br>DEKRA Certification B.V.                         | EN 61535 | NTR NL-7972                                                |
| KEMA/KEUR<br>DEKRA Certification B.V.                   | EN 61535 | 71-123834                                                  |
| Approval                                                | Standard | Certificate Name                                           |
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG | -        | -                                                          |



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance

771-9995/007-101

↓

Documentation

Bid Text

771-9995/007-101

19.02.2019

xml  
2.90 KB

↓

771-9995/007-101

10.12.2014

doc  
24.50 KB

↓

ausschreiben.de

771-9995/007-101

↓

CAD/CAE-Data

CAD data

2D/3D Models

771-9995/007-101

↓

CAE data

EPLAN Data Portal

771-9995/007-101

↓

WSCAD Universe

771-9995/007-101

↓

ZUKEN Portal

771-9995/007-101

↓

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



**Item No.: 770-101**  
Locking lever; for flying leads; for manual operation; black



**Item No.: 770-121**  
Locking lever; for flying leads; for manual operation; white



**Item No.: 770-111**  
Locking lever; for flying leads; for tool operation; black



**Item No.: 770-131**  
Locking lever; for flying leads; for tool operation; white



1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-201](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



[Item No.: 770-221](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



[Item No.: 770-360](#)  
Lockout cap; for plugs; 5-pole; separable; yellow



[Item No.: 897-2005](#)  
Protective cap; Type4; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white