

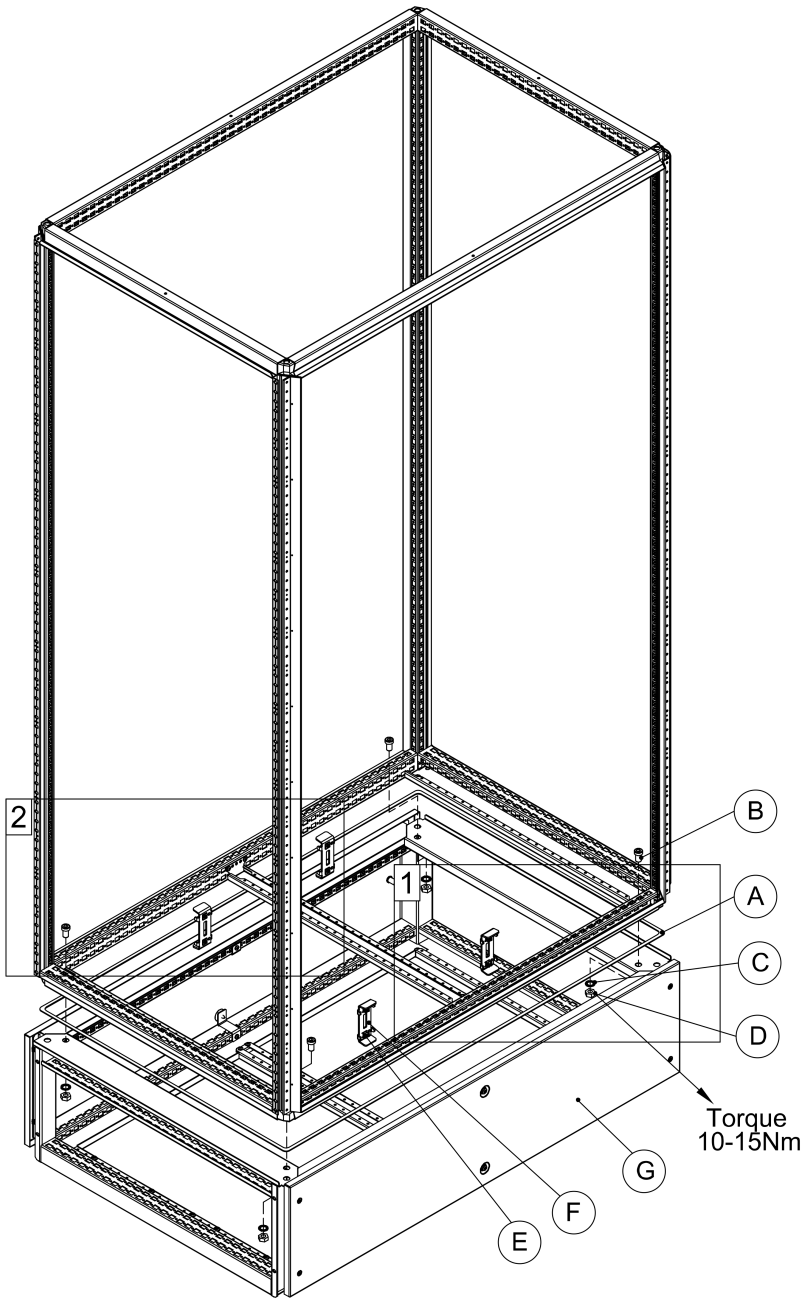


PCU



Ref.	Pic.	
A		1
B		4
C		4
D		4
E		4/8
F		2/4
G		1

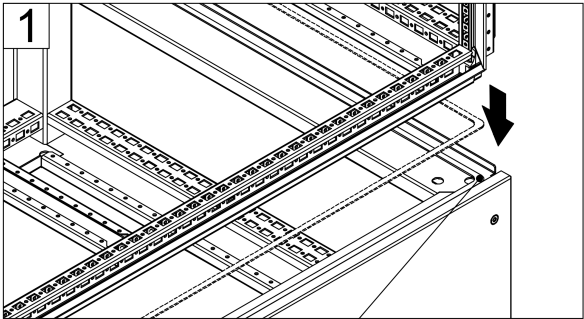


!Note
ALTERNATIVE FIXATION WITH CNT05 (*to be ordered separately)
IP55 protection can be achieved by sealing the bottom opening using the BG01 gasket and bottom plates (CBP)

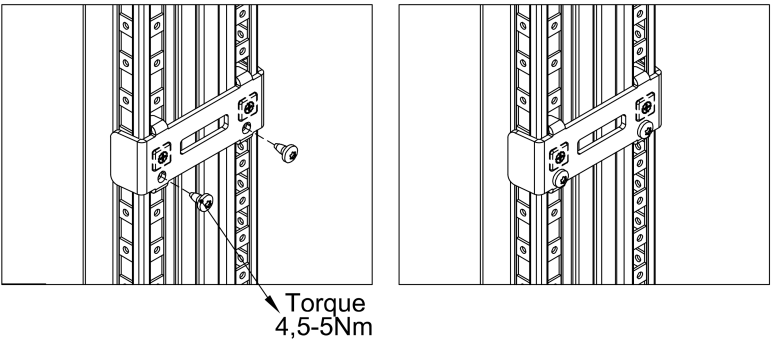





! The adhesive gasket "A" must be fixed outside the frame corner holes

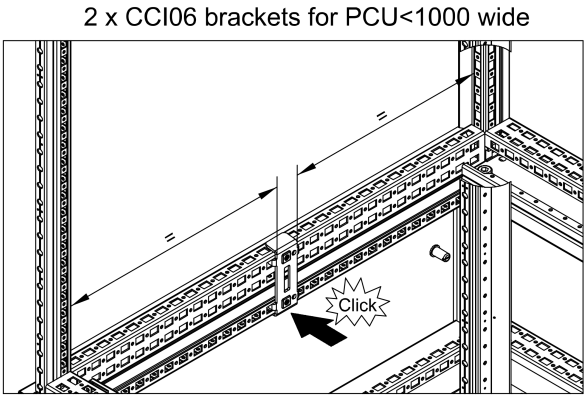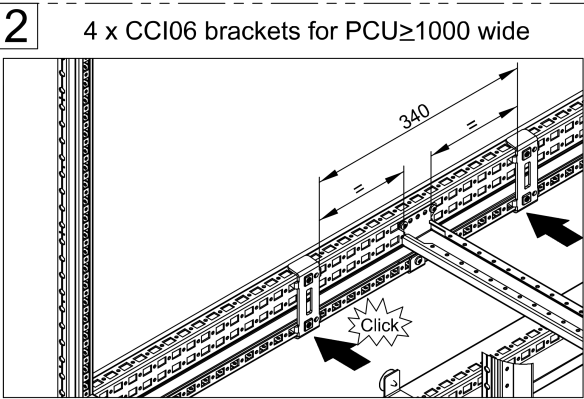




Baying

Ref.	Pic.	
A	 4.5x8	1
B		2

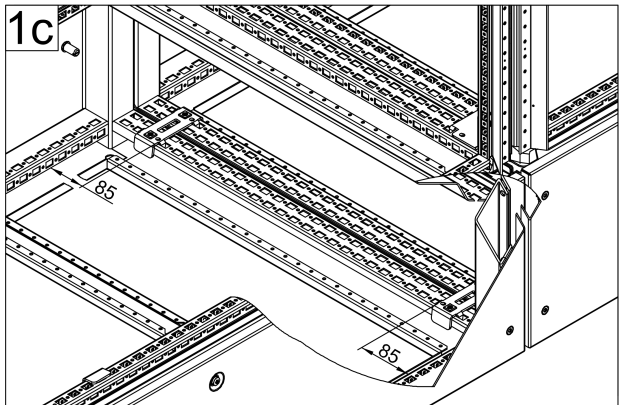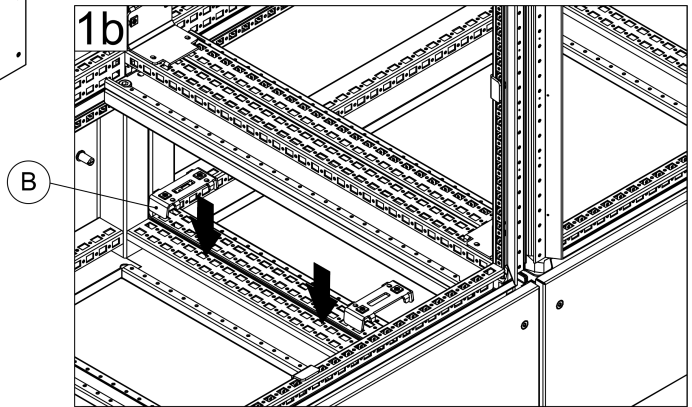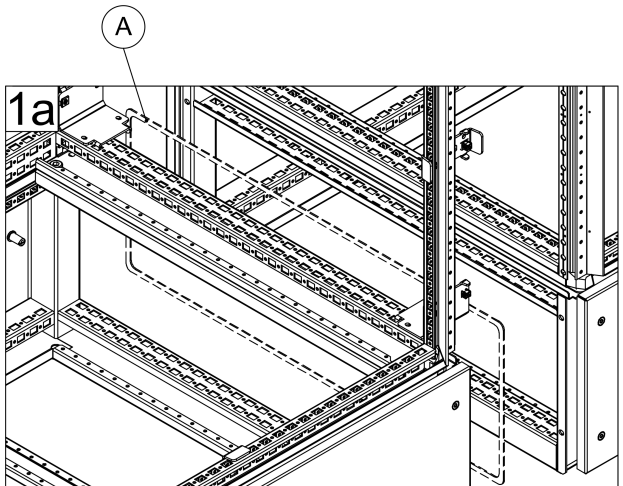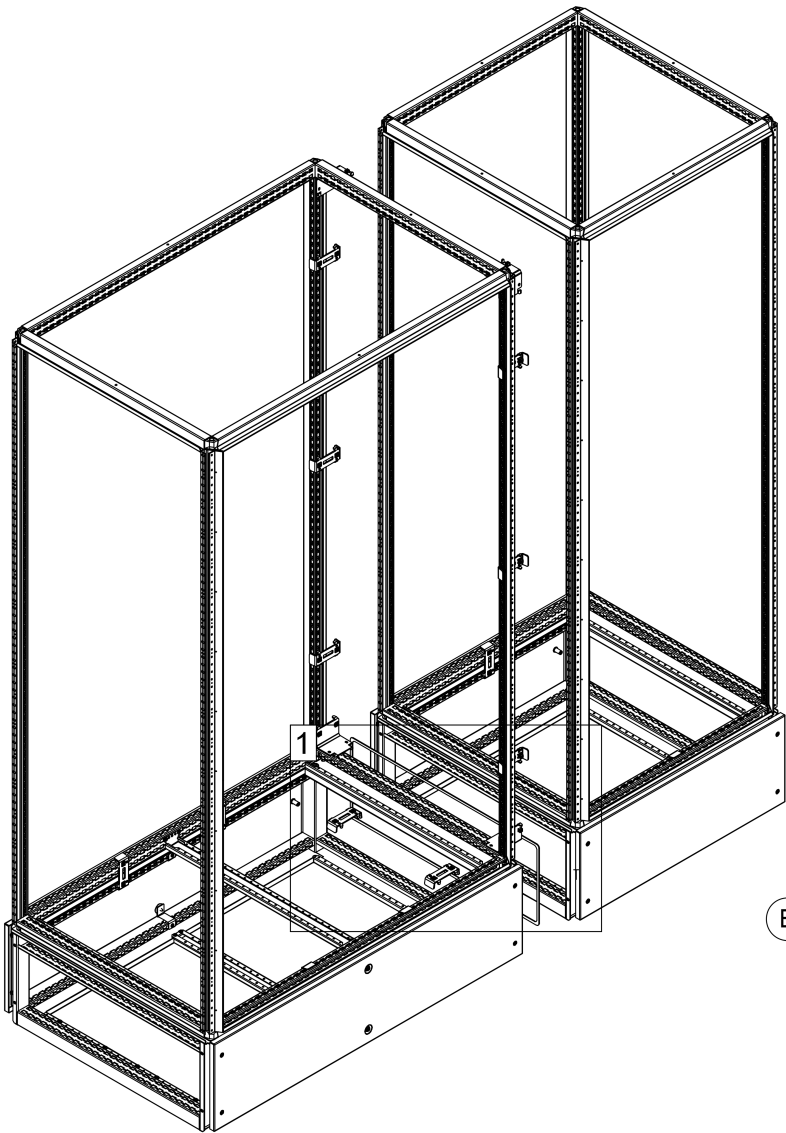

!Note
CCI06 bracket for baying must be ordered separately
ALTERNATIVE FIXATION WITH CNT05 (*to be ordered separately)

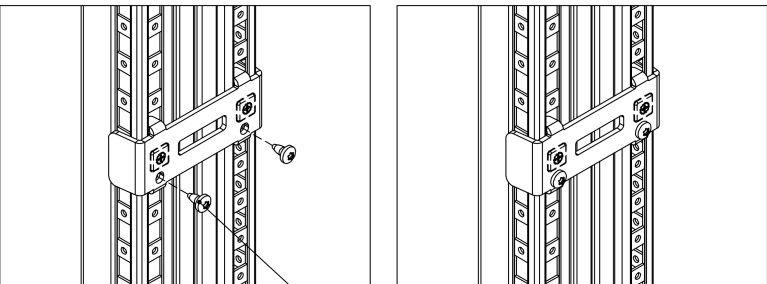

Torque
4,5-5Nm