


Data Sheet | Item Number: 770-526

Shield connecting plate; 5-pole; for sockets; for 2 cables

<https://www.wago.com/770-526>

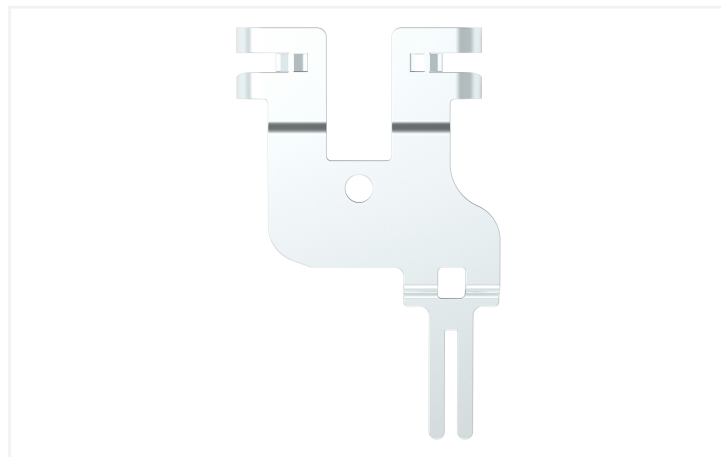

Shield termination WINSTA® MIDI 5-pole

The shield termination from the WINSTA® MIDI product line guarantees you the greatest flexibility in electrical installation. With WAGO, you get enjoy the advantages of a large selection of accessories for the WINSTA® product line. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Due to the integrated test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and costs.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus faster, even more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and installation errors at the construction site. Choose quality and durability – with protection against mismatching from WAGO makes the electrical installation of electrical components noticeably easier.

- for automation controllers
- quick replacement of defective units during ongoing operation

Notes

General safety information

NOTICE: Observe installation and safety instructions!

- Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden!
- Nicht unter Spannung/Last installieren!
- Nur für bestimmungsgemäßen Gebrauch einsetzen!
- Nationale Vorschriften/Normen/Richtlinien beachten!
- Technische Daten der Produkte beachten!
- Auf die richtige Polbelegung achten!
- Keine beschädigten/verschmutzten Komponenten verwenden!
- Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten!
- Leiter bis zum Anschlag einführen!
- Nur mit Verriegelungsklinke und Zugentlastung verwenden!
- Originalzubehör verwenden!

To be sold only with installation instructions!



Connection Data

Connection 1	
Pole number	5

Physical data

Width	25.6 mm / 1.008 inches
Height	5.45 mm / 0.215 inches
Depth	44.8 mm / 1.764 inches

Mechanical data

Suitable	for socket and plug
----------	---------------------

Material data

Note (material data)	Information on material specifications can be found here
Fire load	0 MJ
Weight	0.3 g
Material	Copper (SE Cu); special tin coating

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966242829
Customs tariff number	85366990990

Product Classification

UNSPSC	39121421
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------



Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 770-526	

CAD/CAE-Data	
CAD data	
2D/3D Models 770-526	