


Data Sheet | Item Number: 770-1627

Mounting plate; 2-pole; for distribution connectors; Plastic; white


<https://www.wago.com/770-1627>



Color: ■ white

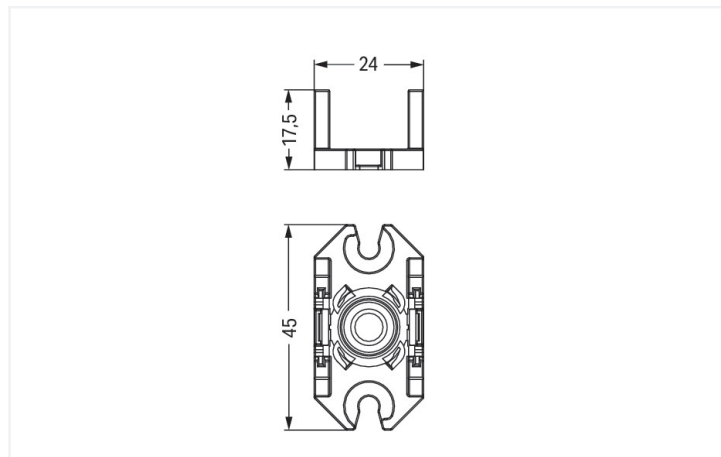

Dimensions in mm

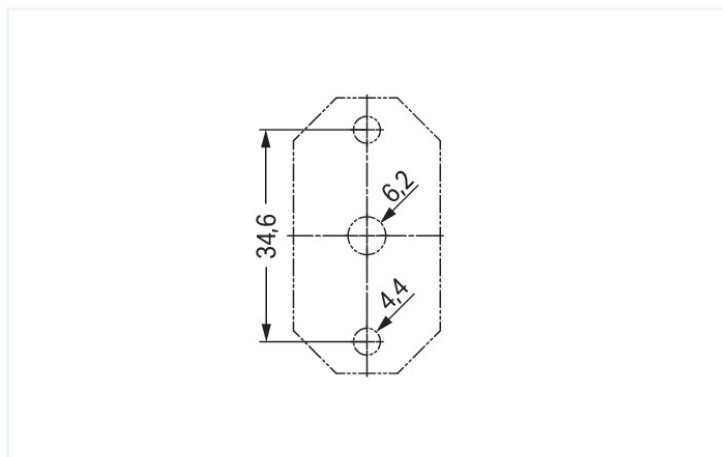

Dimensions in mm

Mounting accessories WINSTA® MIDI 2-pole

The mounting accessories from the WINSTA® MIDI product line is the best solution for trouble-free electrical installation. You can rely on the level of quality of WINSTA® components from WAGO for your electrical installation accessories too. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in can be found in a variety of projects you can use for quick, easy, flexible, and secure installation.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Choose quality and durability – with protection against mismatching from WAGO makes the installation of electrical components visibly easier.

- simple circuits
- convenient installation and commissioning



Notes	
General safety information	NOTICE: Observe installation and safety instructions! • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105- 100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! To be sold only with installation instructions!

Connection Data	
Connection 1	
Pole number	2

Mechanical data	
Mounting type	Screw mount
Suitable	for distribution connectors (except T-distribution connectors); 2-pole

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.12 MJ
Weight	4 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821854531
Customs tariff number	39269097900



Product Classification	
UNSPSC	39121321
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-1627

↓

Documentation			
Bid Text			
770-1627	19.02.2019	xml 2.55 KB	↓
770-1627	14.01.2015	doc 22.50 KB	↓

CAD/CAE-Data	
CAD data 2D/3D Models 770-1627 ↓	CAE data ZUKEN Portal 770-1627 ↓