


Data Sheet | Item Number: 770-1626

Mounting plate; 2-pole; for distribution connectors; Plastic; black


<https://www.wago.com/770-1626>



Color: ■ black

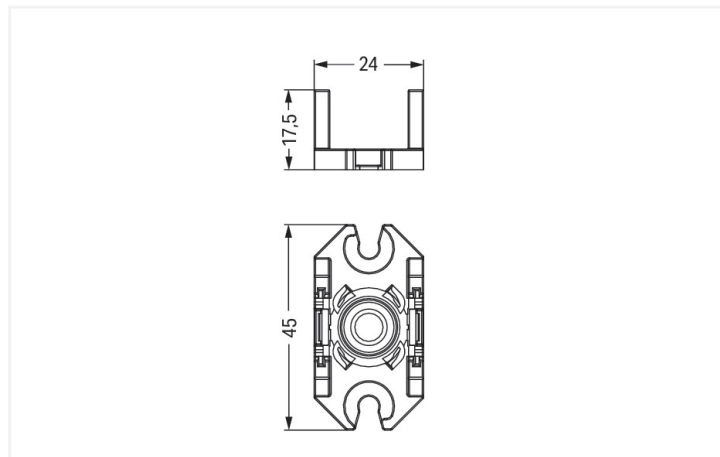

Dimensions in mm

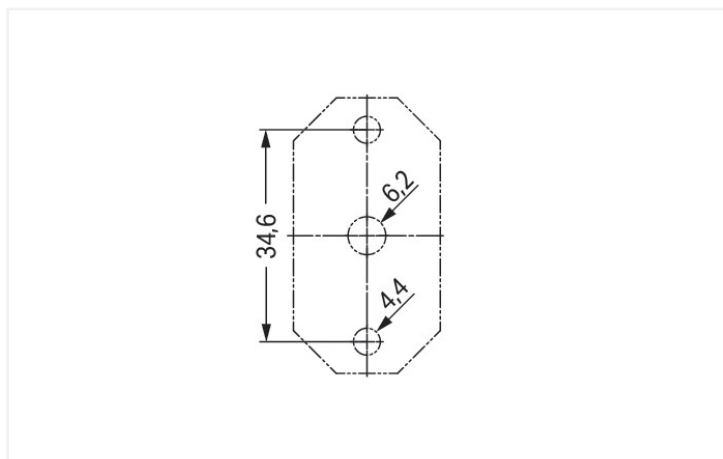

Dimensions in mm

Mounting accessories WINSTA® MIDI 2-pole

Put your trust in reliable safety for the electrical installation for the implementation of your project: The mounting accessories from the WINSTA® MIDI product line. A comprehensive range of accessories rounds out the WINSTA® product line from WAGO. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Due to the included test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and expense.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently more efficient, even more reliable, and error-free. Using this pre-assembled system decreases assembly times and installation errors at the construction site. Now you can also cut installation expenses without compromising quality and safety: with protection against mismatching eliminates the need for servicing and prevents unnecessary downtime.

- for automation controllers
- convenient installation and commissioning



Notes	
General safety information	NOTICE: Observe installation and safety instructions! • Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105- 100) anzuwenden! • Nicht unter Spannung/Last installieren! • Nur für bestimmungsgemäßen Gebrauch einsetzen! • Nationale Vorschriften/Normen/Richtlinien beachten! • Technische Daten der Produkte beachten! • Auf die richtige Polbelegung achten! • Keine beschädigten/verschmutzten Komponenten verwenden! • Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten! • Leiter bis zum Anschlag einführen! • Nur mit Verriegelungsklinke und Zugentlastung verwenden! • Originalzubehör verwenden! To be sold only with installation instructions!

Connection Data	
Connection 1	
Pole number	2

Mechanical data	
Mounting type	Screw mount
Suitable	for distribution connectors (except T-distribution connectors); 2-pole

Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.12 MJ
Weight	4 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821854524
Customs tariff number	39269097900



Product Classification		
UNSPSC		39121321
eCl@ss 10.0		27-44-06-92
eCl@ss 9.0		27-44-06-92
ETIM 9.0		EC002863
ETIM 10.0		EC002863
ECCN		NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-1626

↓

Documentation				
Bid Text				
770-1626	19.02.2019	xml	2.55 KB	↓
770-1626	14.01.2015	doc	22.50 KB	↓

CAD/CAE-Data	
CAD data 2D/3D Models 770-1626 ↓	CAE data ZUKEN Portal 770-1626 ↓