


Data Sheet | Item Number: 770-527

Shield connecting plate; 5-pole; for plugs; for 2 cables; silver-colored

<https://www.wago.com/770-527>

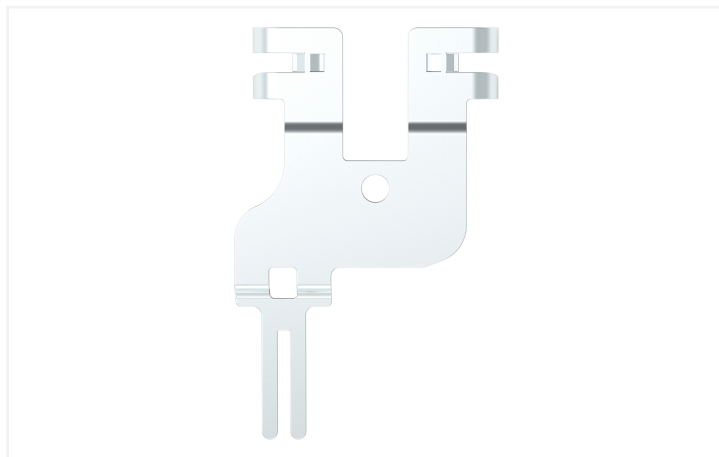

Color: ■ silver-colored

Shield termination WINSTA® MIDI 5-pole

Realize the energy supply effortlessly: The shield termination from the WINSTA® MIDI product line is the product of your choice for error-free electrical installation. With WAGO, you can enjoy the advantages of a large selection of accessories for the WINSTA® product line. The WINSTA® MIDI product line achieves flexibility for the electrical installation. Through its Push-in CAGE CLAMP® spring pressure connection technology, it ensures error-free, time-saving installation and offers flexibility and customization for meeting all installation requirements.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

The WINSTA® Pluggable Connection System is ideally tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and consequently more efficient, more reliable, and error-free. Using this pre-assembled system reduces time spent on assembly and installation errors at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- for automation controllers
- rapid, structured electrical installation

Notes

General safety information

NOTICE: Observe installation and safety instructions!

- Nur von Elektrofachkraft oder einer für die Tätigkeit elektrisch unterwiesenen Person (EUP nach DIN VDE 0105-100) anzuwenden!
- Nicht unter Spannung/Last installieren!
- Nur für bestimmungsgemäßen Gebrauch einsetzen!
- Nationale Vorschriften/Normen/Richtlinien beachten!
- Technische Daten der Produkte beachten!
- Auf die richtige Polbelegung achten!
- Keine beschädigten/verschmutzten Komponenten verwenden!
- Leiterarten, -querschnitte, Abisolierlängen und Leitungsdurchmesser beachten!
- Leiter bis zum Anschlag einführen!
- Nur mit Verriegelungsklinke und Zugentlastung verwenden!
- Originalzubehör verwenden!

To be sold only with installation instructions!



Connection Data

Connection 1	
Pole number	5

Physical data

Width	25.6 mm / 1.008 inches
Height	5.45 mm / 0.215 inches
Depth	44.8 mm / 1.764 inches

Mechanical data

Suitable	for socket and plug
----------	---------------------

Material data

Note (material data)	Information on material specifications can be found here
Color	silver-colored
Fire load	0 MJ
Weight	0.3 g
Material	Copper (SE Cu); special tin coating

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966242942
Customs tariff number	85366990990

Product Classification

UNSPSC	39121421
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------



Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 770-527	

CAD/CAE-Data	
CAD data	
2D/3D Models 770-527	