

CUBE20S POTENTIAL DISTRIBUTORS

8 x 24 V DC
Art.No.: 57120
Weight: 0.074 kg
Country of origin: TH
Model designation: Cube20S Potential distributors 8x24VDC


Potential distributor
8x 24 V DC

Link to Product

Illustration



Product may differ from Image

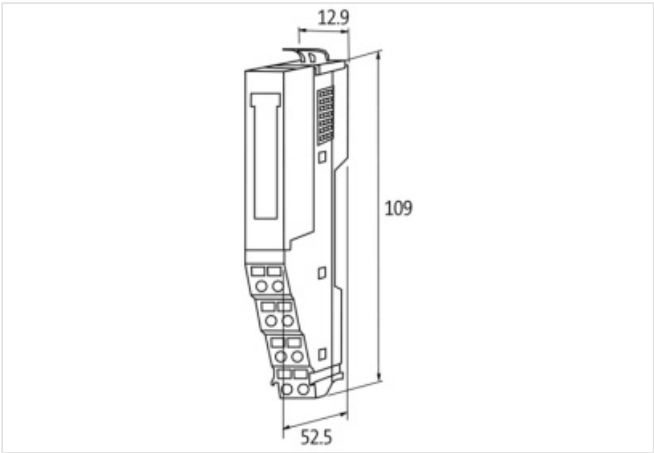

Commercial data

URL Webshop	https://shop.murrelektronik.com/57120
GTIN	4048879422437
EU-Customs tariff number	85369010
US-Customs tariff number	8536904000
ECLASS-6.0	27379201
ECLASS-6.1	27242611
ECLASS-7.0	27242611
ECLASS-7.1	27242611
ECLASS-8.0	27242611
ECLASS-8.1	27242611
ECLASS-9.0	27242611
ECLASS-9.1	27242611
ECLASS-10.0.1	27242611
ECLASS-10.1	27242611
ECLASS-11.0	27242611
ECLASS-11.1	27242611
ECLASS-12.0	27242611
ECLASS-13.0	27242611
ECLASS-14.0	27242611
ETIM-5.0	EC001600

ETIM-6.0	EC001600
ETIM-7.0	EC001600
ETIM-8.0	EC001600
ETIM-9.0	EC001600
ETIM-10.0	EC001600
customs tariff number	85369010
EAN	4048879422437
Packaging unit	1

Electrical data | Supply

Operating voltage DC max.	30 V
Total current max.	10 A

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP20
-------------------------------------	------

Mechanical data | Mounting data

Height	109 mm
Width	12,9 mm
Depth	52,5 mm
Mounting method	geschnappt
Suitable for mounting type	(EN 60715), mounting rail

Environmental characteristics | Climatic

Operating temperature min.	0 °C
Operating temperature max.	60 °C
Ambient temperature (storage, transport)	-25 °C ... 70 °C

Connection type 2

Connection type 1	Power
Connection type 2	Power
Family construction form	terminal
No. of poles	8
Gender	female
Color contact carrier	black
Connection	Spring clamp terminals FK
PIN 1	n.c.
PIN 2	24 V DC
PIN 3	0 V
PIN 4	24 V DC Sys
PIN 5	n.c.
PIN 6	24 V DC
PIN 7	0 V
PIN 8	0 V Sys
Family construction form	terminal
No. of poles	8
Gender	female
Connection	Spring clamp terminals FK
PIN 1	24 V DC
PIN 2	24 V DC
PIN 3	24 V DC
PIN 4	24 V DC
PIN 5	24 V DC
PIN 6	24 V DC
PIN 7	24 V DC
PIN 8	24 V DC