CUBE20S COMMUNICATION MODULE

RS232

Art.No.: 57140
Weight: 0.060 kg
Country of origin: TH
Model designation: Cube20S Communication module RS232

RS232

Link to Product

Illustration

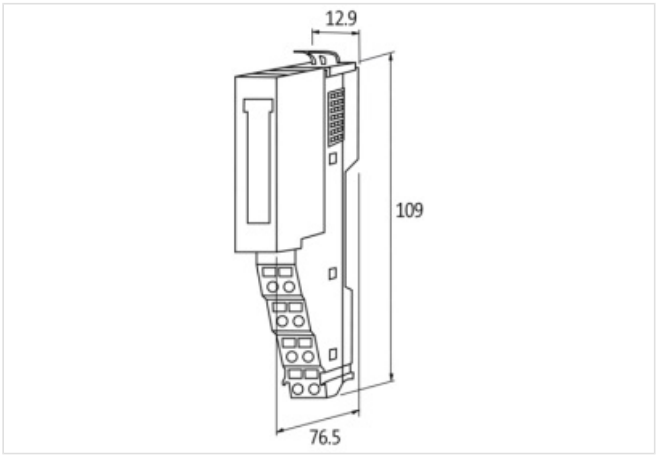

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/57140
GTIN	4048879422901
EU-Customs tariff number	85389099
US-Customs tariff number	8538908180
ECLASS-6.0	27242605
ECLASS-6.1	27242608
ECLASS-7.0	27242608
ECLASS-7.1	27242608
ECLASS-8.0	27242608
ECLASS-8.1	27242608
ECLASS-9.0	27242608
ECLASS-9.1	27242608
ECLASS-10.0.1	27242608
ECLASS-10.1	27242608
ECLASS-11.0	27242608
ECLASS-11.1	27242608
ECLASS-12.0	27242608
ECLASS-13.0	27242608
ECLASS-14.0	27242608
ETIM-5.0	EC001604

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-27

ETIM-6.0	EC001604
ETIM-7.0	EC001604
ETIM-8.0	EC001604
ETIM-9.0	EC001604
ETIM-10.0	EC001604
customs tariff number	85389099
EAN	4048879422901
Packaging unit	1
Electrical data | Supply	
Current consumption max.	100 mA
module supply	via system connection
Industrial Communication	
Transmission rate min.	150 kbit/s
Data transmission rate max.	115,2 kbit/s
Diagnostics	
Short circuit diagnosis	Yes
Overload diagnosis	Yes
Diagnostic	Under voltage
Diagnostic via BUS	per module
Diagnostic via LED	per module and channel
LED display	Ethernet connection/data traffic
Device protection | Electrical	
Degree of protection (EN IEC 60529)	IP20
Mechanical data | Mounting data	
Height	109 mm
Width	12,9 mm
Depth	76,5 mm
Mounting method	geschnappt
Suitable for mounting type	(EN 60715), mounting rail
Environmental characteristics | Climatic	
Operating temperature min.	0 °C
Operating temperature max.	60 °C
Ambient temperature (storage, transport)	-25 °C … 70 °C
Connection type 2	
Connection type 1	Power
Connection type 2	Power
Family construction form	terminal
No. of poles	8
Gender	female
Color contact carrier	black
Connection	Spring clamp terminals FK
PIN 1	n.c.
PIN 2	24 V DC
PIN 3	0 V
PIN 4	24 V DC Sys
PIN 5	n.c.
PIN 6	24 V DC
PIN 7	0 V
PIN 8	0 V Sys
Family construction form	terminal
No. of poles	8

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-27

Gender	female
Connection	Spring clamp terminals FK
PIN 1	TXD
PIN 2	RTS
PIN 3	DCD
PIN 4	DSR
PIN 5	RXD
PIN 6	CTS
PIN 7	GND_ISO
PIN 8	DTR

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-27