

MKN POWER SUPPLY 1-PHASE, LINEAR REGULATED

IN: 230VAC OUT: 9,5-15V/0,1ADC

Art.No.: 85625

Weight: 0.200 kg

Country of origin: CZ

Model designation: MKN 0,1-230/9,5-15

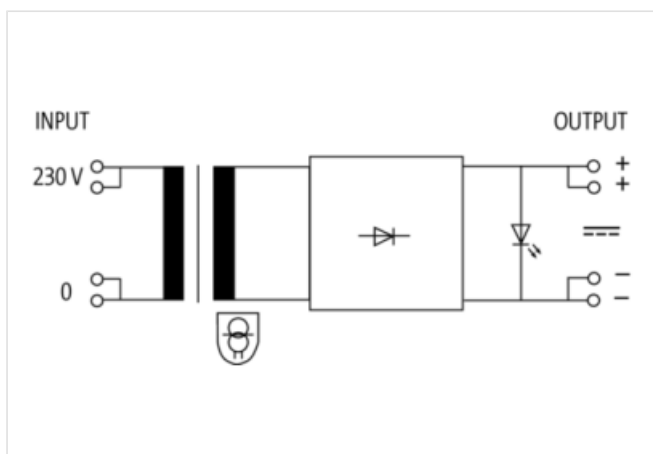
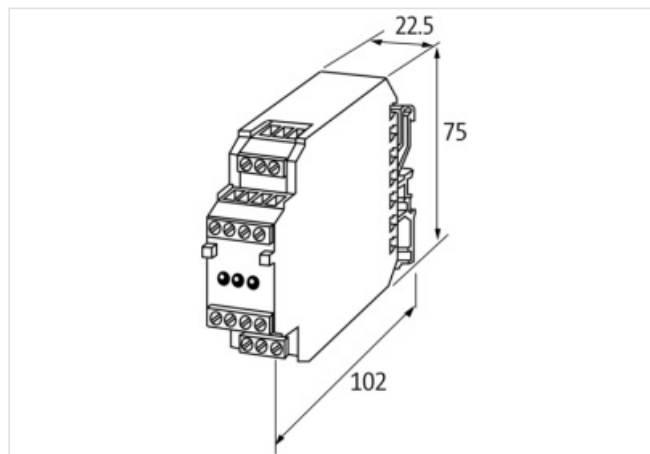
INPUT: 230 V AC

OUTPUT: 9.5...15 V DC

Current: 100 mA

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Condensation not permitted

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

URL Webshop

<https://shop.murrelektronik.com/85625>

GTIN

4048879079617

EU-Customs tariff number	85044095
US-Customs tariff number	8504409580
ECLASS-6.0	27049002
ECLASS-6.1	27049002
ECLASS-7.0	27049002
ECLASS-7.1	27049002
ECLASS-8.0	27049002
ECLASS-8.1	27049002
ECLASS-9.0	27040701
ECLASS-9.1	27040701
ECLASS-10.0.1	27040701
ECLASS-10.1	27040701
ECLASS-11.0	27040701
ECLASS-11.1	27040701
ECLASS-12.0	27040701
ECLASS-13.0	27040701
ECLASS-14.0	27040701
ETIM-5.0	EC002540
ETIM-6.0	EC002540
ETIM-7.0	EC002540
ETIM-8.0	EC002540
ETIM-9.0	EC002540
ETIM-10.0	EC002540
customs tariff number	85044095
EAN	4048879079617
Packaging unit	1

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Input voltage AC min.	207 V
Input voltage AC max.	253 V
Input current	30 mA
Characteristic back-up fuse	Inertia
External back-up fuse per phase max.	0,063 A

Electrical data | Output

Output current max.	0,1 A
Output suppression	VDR, Screening capacitor
Ripple (s-s) max.	10 mV

Device protection | Electrical

Overload protection output	Yes
Short-circuit protection output	Yes

Mechanical data | Mounting data

Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715), G32

Environmental characteristics | Electromagnetic compatibility

Interference emission	EN IEC 55011, IEC 61000-3-2
-----------------------	-----------------------------

Environmental characteristics | Climatic

Operating temperature min.	0 °C
Operating temperature max.	60 °C

Conformity

Product standard	EN IEC 61558-2-6, IEC 62041 category II
------------------	---