

Modlight70 Pro buzzer

4 tones

Art.No.: 4000-76070-1100004
Weight: 0.065 kg
Country of origin: ID
Model designation: Modlight70 Pro BUZZER


Buzzer modules

Link to Product

Illustration



Product may differ from Image

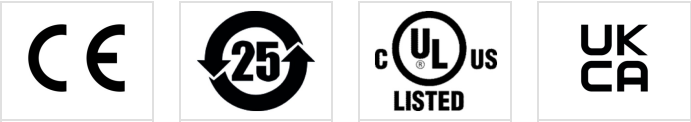

Commercial data	
Manufacturer name	Murrelektronik GmbH
URL Webshop	https://shop.murrelektronik.com/4000-76070-1100004
GTIN	4048879752497
EU-Customs tariff number	85318070
US-Customs tariff number	8531809051
ECLASS-6.0	27371200
ECLASS-6.1	27371237
ECLASS-7.0	27371237
ECLASS-7.1	27371237
ECLASS-8.0	27371237
ECLASS-8.1	27371237
ECLASS-9.0	27371237
ECLASS-9.1	27371237
ECLASS-10.0.1	27371237
ECLASS-10.1	27371237
ECLASS-11.0	27371237
ECLASS-11.1	27371237
ECLASS-12.0	27371237
ECLASS-13.0	27371237
ECLASS-14.0	27371237

ETIM-5.0	EC001152
ETIM-6.0	EC001152
ETIM-7.0	EC001152
ETIM-8.0	EC001152
ETIM-9.0	EC001152
ETIM-10.0	EC001152
customs tariff number	85318070
EAN	4048879752497
Packaging unit	1

Electrical data | Supply

Operating voltage DC	24 V
Operating voltage DC min.	21,6 V
Operating voltage DC max.	26,4 V
Current consumption	50 mA
Current consumption max.	250 mA
Power consumption max.	1,6 W

Electrical data | Output

Rated power consumption	1,3 W
-------------------------	-------

HMI

Buzzer sound	rapid beep, continuous beep, rapid high-low, sweep sound
Sound pressure at 1 m	90 dB
Reduced sound pressure at 1 m	80 dB
Frequency buzzer sound	3378 Hz (rapid beep), 3378 Hz (continuous beep), 2016 Hz & 3012 Hz (rapid high-low), 1000 Hz ... 4032 Hz (sweep sound)

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	locked, inserted

Mechanical data | Material data

housing	PC
Color housing	black

Mechanical data | Mounting data

Net weight	0,07 g
Height	53,5 mm
Diameter	70 mm

Environmental characteristics | Climatic

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage, transport)	-30 °C ... 60 °C