

Bus terminating plug M12 female B-cod.

Termination resistor, Profibus

Art.No.: 7000-14091-0000000

Weight: 0.010 kg

Country of origin: DE

Model designation: MSBB05L0-T 1-4R.2-3R.2-4R

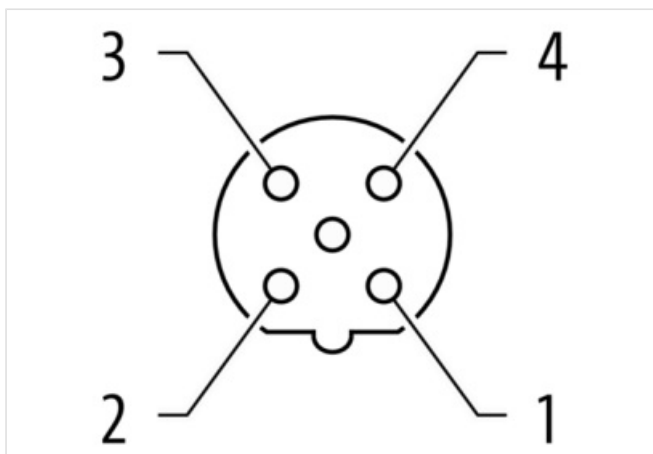
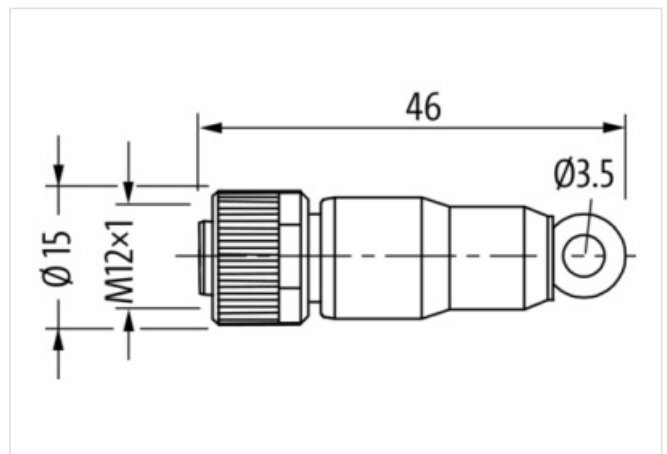
Profibus

Terminating resistor

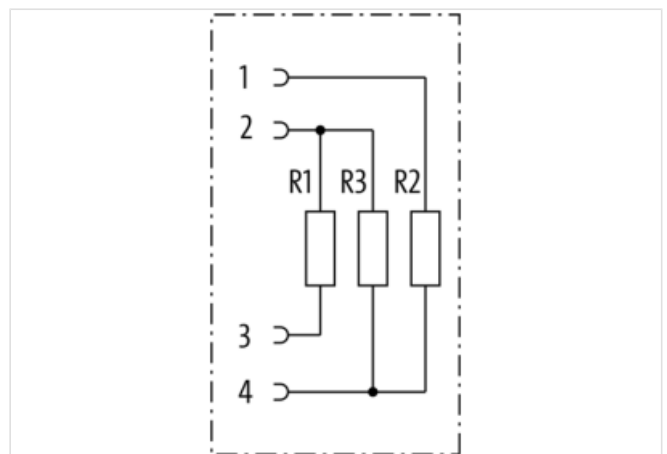
Female

M12, 4-pole

B-coded

[Link to Product](#)**Illustration**

Product may differ from Image

**Side 1**

Family construction form M12

Degree of protection (EN IEC 60529) IP67

Commercial data	
URL Webshop	https://shop.murrelektronik.com/7000-14091-0000000
EU-Customs tariff number	85331000
US-Customs tariff number	8533100042
ETIM-9.0	EC001855
ETIM-10.0	EC001855
customs tariff number	85331000
EAN	4048879419123
Packaging unit	1
Electrical data Supply	
Operating voltage DC max.	30 V
Current operating per contact max.	4 A
Operating voltage DC max. (UL-listed)	30 V
Installation Connection	
Tightening torque	0,6 Nm
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Mechanical data Material data	
Locking material	Zinc die-casting
Coating locking	Nickeled
Mechanical data Mounting data	
Mounting method	inserted, screwed, Shaking protection
Environmental characteristics Climatic	
Operating temperature min.	-30 °C
Operating temperature max.	85 °C