

SVS Eco valve plug A-18mm screw terminal

2-pol. + FE, 0,5 - 1,5mm², 6 - 8mm, LED+VDR 24V

Art.No.: 7000-29005-0000000

Weight: 0.028 kg

Country of origin: HU

Model designation: MSVSE-EB1X-M16 SVS Eco LED

Form A (18 mm)

24 V AC/DC $\pm 15\%$

LED and VDR

metric




Field-wireable


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

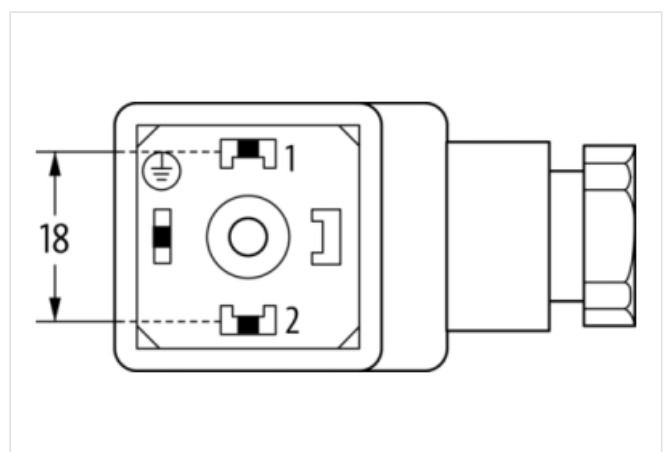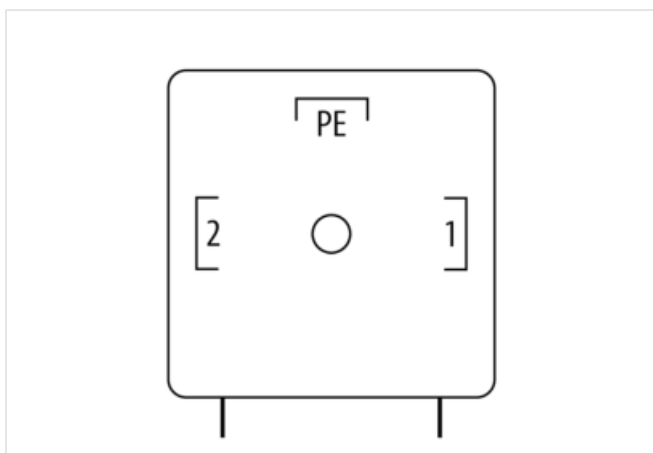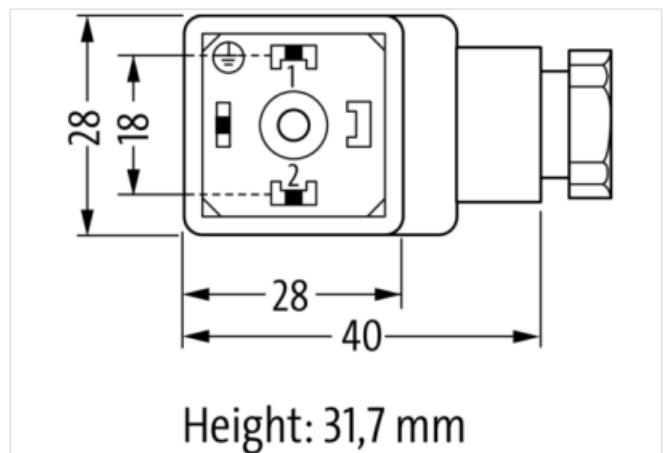

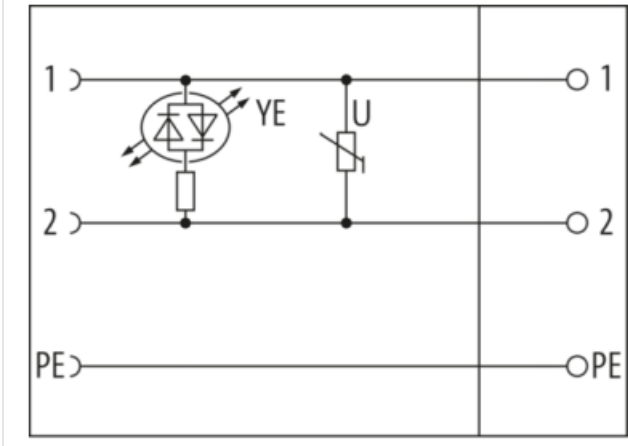

Product may differ from Image



Side 1

Family construction form	Valve connector form A
Mounting method	pluggable, screwed
Degree of protection (EN IEC 60529)	IP65

Commercial data

URL Webshop	https://shop.murrelektronik.com/7000-29005-0000000
EU-Customs tariff number	85366990
US-Customs tariff number	8536694020
ETIM-9.0	EC002635
ETIM-10.0	EC002635
customs tariff number	85366990
EAN	4048879187671
Packaging unit	1

Electrical data | Supply

Operating voltage AC	24 V
Operating voltage AC min.	20,4 V
Operating voltage AC max.	26,4 V
Operating voltage DC	24 V
Operating voltage DC min.	20,4 V
Operating voltage DC max.	26,4 V
Current operating per contact max.	1,5 A

Diagnostics

Status indication LED	yellow
-----------------------	--------

Installation

Connection cross section min.	0,5 mm²
Connection cross section max.	1,5 mm²

Installation | Connection

Tightening torque	0,4 Nm
Tightening torque tolerance	± 0,1 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M16 x 1.5

Installation | Pin assignment

No. of poles	2 + PE
--------------	--------

Device protection | Electrical

Additional condition protection degree	inserted, screwed
Additional suppressor	Varistor

Mechanical data | Material data

housing	PA
Color housing	opaque
Gasket	NBR

Mechanical data | Mounting data

Fastening screw	M3x31
Clamping range min.	6 mm
Clamping range max.	8 mm

Environmental characteristics | Climatic

Operating temperature min.	-40 °C
Operating temperature max.	90 °C

Important installation notes

Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.