

SVS Eco valve plug A-18mm screw terminal

3-pol. + PE, 0,5 - 1,5mm², 6 - 8mm

Art.No.: 7000-29405-0000000

Weight: 0.028 kg

Country of origin: HU

Model designation: MSVSE-EB5K-M16 SVS Eco

Form A (18 mm) for pressure switch

250 V AC/DC

without components

metric




Field-wireable


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

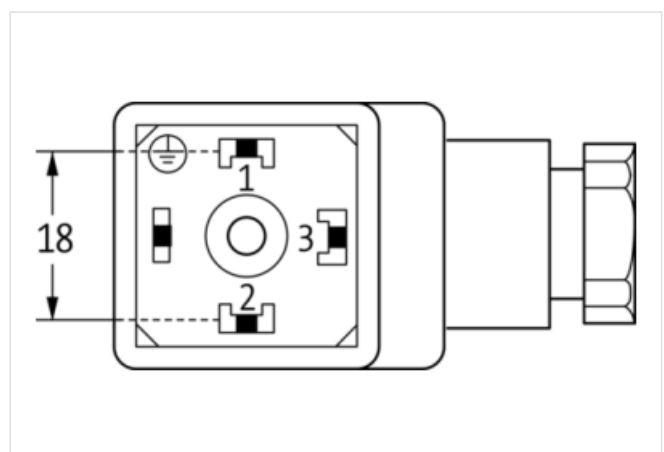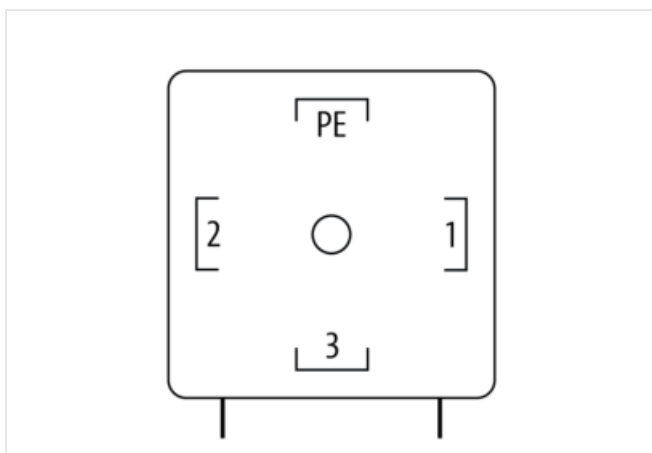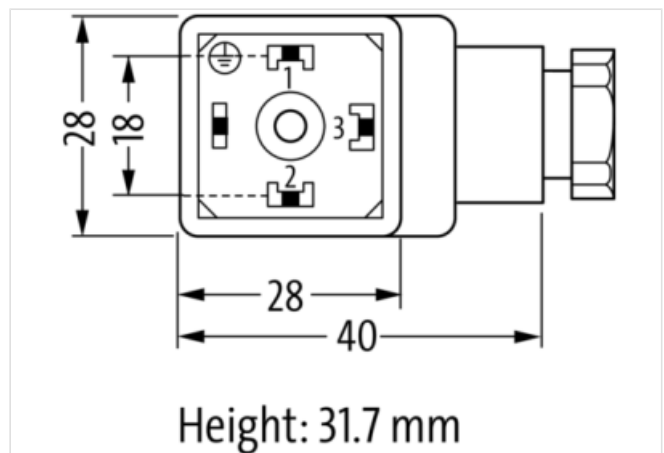

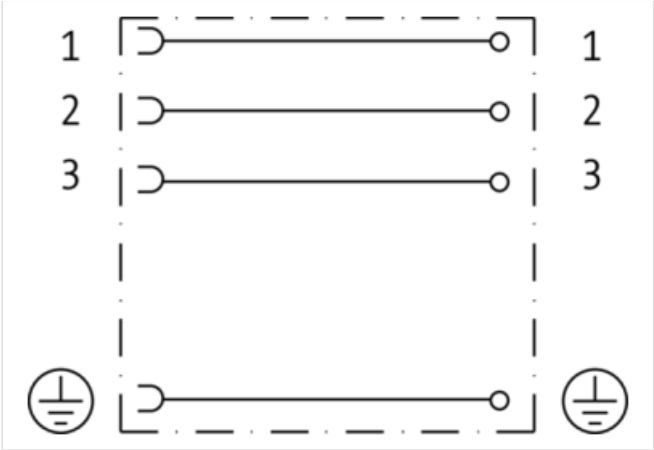

Product may differ from Image



Side 1	
Family construction form	Valve connector form A
Mounting method	pluggable, screwed
Degree of protection (EN IEC 60529)	IP65
Commercial data	
URL Webshop	https://shop.murrelektronik.com/7000-29405-0000000
EU-Customs tariff number	85366990
US-Customs tariff number	8536694020
ETIM-9.0	EC002635
ETIM-10.0	EC002635
customs tariff number	85366990
EAN	4048879187435
Packaging unit	1
Electrical data Supply	
Operating voltage AC max.	250 V
Operating voltage DC max.	250 V
Current operating per contact max.	10 A
Installation	
Connection cross section min.	0,5 mm²
Connection cross section max.	1,5 mm²
Installation Connection	
Tightening torque	0,4 Nm
Tightening torque tolerance	± 0,1 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M16 x 1.5
Installation Pin assignment	
No. of poles	3 + PE
Device protection Electrical	
Additional condition protection degree	inserted, screwed
Mechanical data Material data	
housing	PA

Color housing	black
Gasket	NBR
Mechanical data Mounting data	
Fastening screw	M3x31
Clamping range min.	6 mm
Clamping range max.	8 mm
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	90 °C
Important installation notes	
Note on bending radius	Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.