

Bus terminating plug M12 male B-cod. F&B

CUBE67 HD

Art.No.: 7014-15041-0000000

Weight: 0.011 kg

Country of origin: DE

Model designation: MSAL0-2_4-5-S14 ABS

Cube67

Terminating resistor

Male

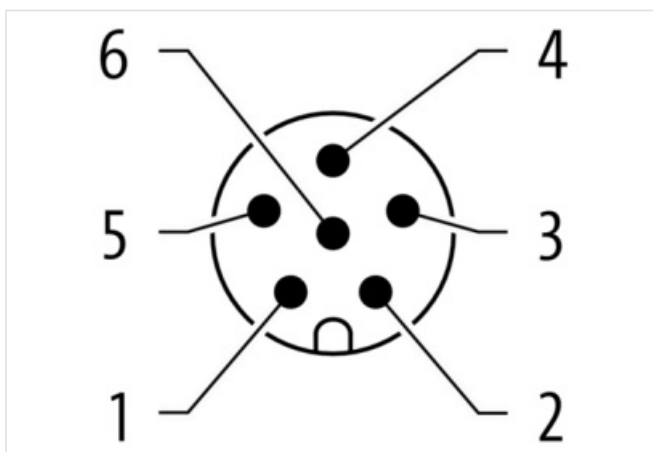
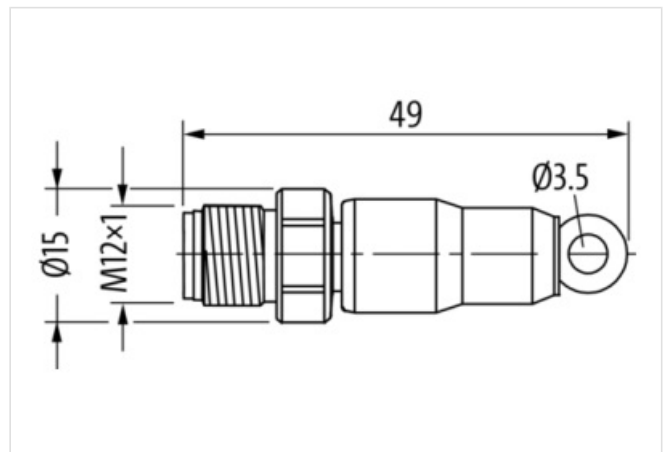
M12, 6-pole

A-coded

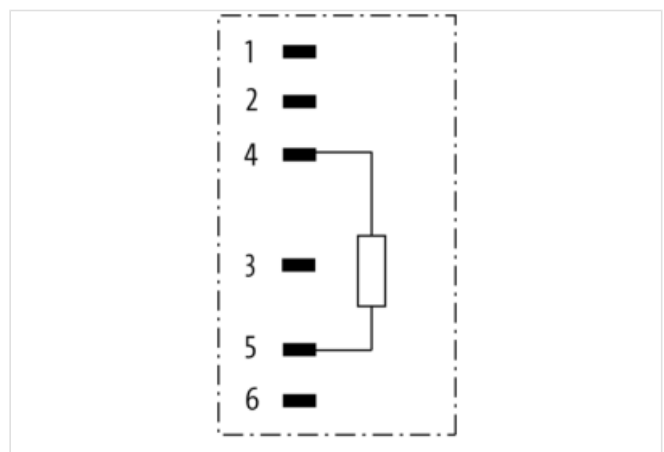
Stainless steel 1.4404 (V4A)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Side 1**

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-27

Murrelektronik GmbH | Grabenstraße 29 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Family construction form	M12
No. of poles	6
Coding	A
Mounting method	inserted, screwed
Threaded hole	M12 x 1
Tightening torque	0,6 Nm
Width across flats	SW14
Material contact	Copper alloy
Degree of protection (EN IEC 60529)	IP67, IP69K

Commercial data

URL Webshop	https://shop.murrelektronik.com/7014-15041-0000000
GTIN	4048879706919
EU-Customs tariff number	85332100
US-Customs tariff number	8533210090
ECLASS-6.0	19070403
ECLASS-6.1	27260702
ECLASS-7.0	27440390
ECLASS-7.1	27440190
ECLASS-8.0	27440190
ECLASS-8.1	27440190
ECLASS-9.0	27440190
ECLASS-9.1	27440190
ECLASS-10.0.1	27440190
ECLASS-10.1	27440190
ECLASS-11.0	27440190
ECLASS-11.1	27440190
ECLASS-12.0	27440190
ECLASS-13.0	27440190
ECLASS-14.0	27440190
ETIM-5.0	EC000830
ETIM-6.0	EC000830
ETIM-9.0	EC001855
ETIM-10.0	EC001855
customs tariff number	85332100
EAN	4048879706919
Packaging unit	1

Electrical data | Supply

Operating voltage DC max.	30 V
Current operating per contact max.	4 A
Operating voltage DC max. (UL-listed)	30 V

Diagnostics

Status indication LED	No
-----------------------	----

Installation | Connection

Gender	male
Tightening torque	0,6 Nm
Mounting set	M12 x 1

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP67, IP69K
Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	0,8 kV
Material group (IEC 60664-1)	I

Mechanical data | Material data

housing	PUR
Coating contact	gold plated
Locking material	Stainless steel 1.4404 (V4A)

Mechanical data | Mounting data

Mounting method	inserted, screwed, Shaking protection
-----------------	---------------------------------------

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
Operating temperature max.	85 °C