

M12 male 0° with cable F&B Pro

CUBE67

Art.No.: 7024-15041-0000000

Weight: 0.010 kg

Country of origin: DE

Model designation: MSAL0-2_4-5-S24 ABS

F&B Pro

Cube67

Terminating resistor

Male

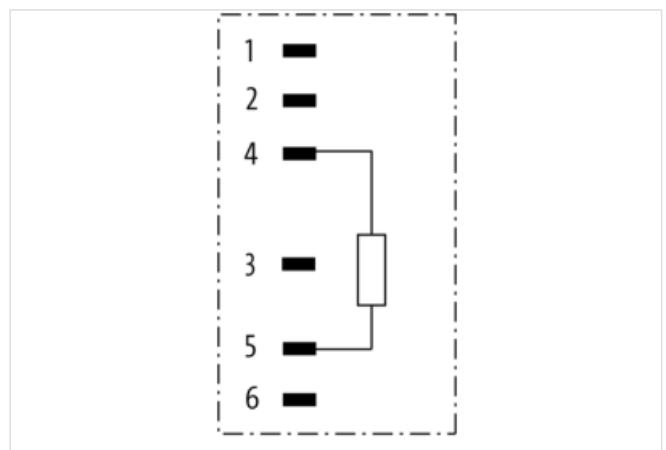
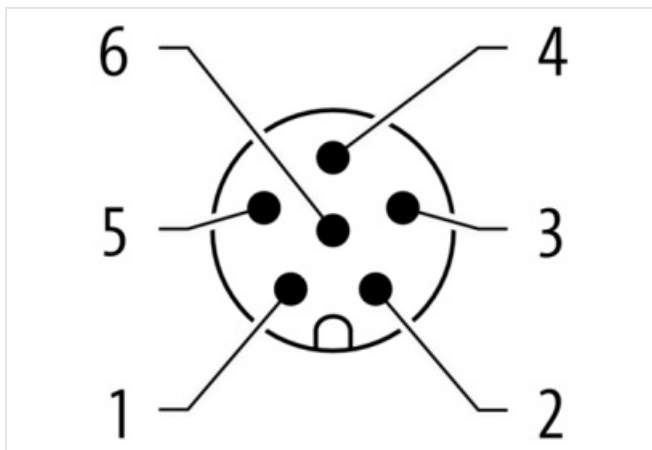
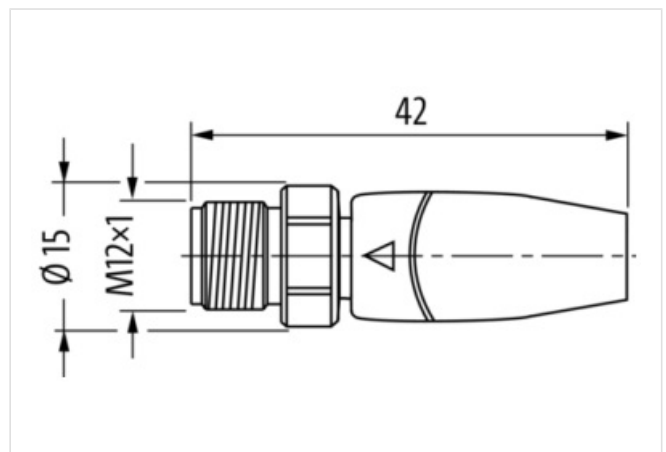
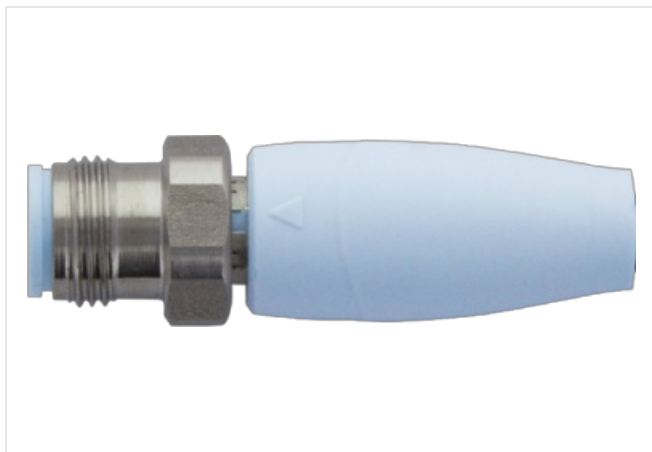
M12, 6-pole

A-coded

Stainless steel 1.4404 (V4A)

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product**Illustration**

Product may differ from Image



Side 1

Family construction form	M12
No. of poles	6
Coding	A
Mounting method	inserted, screwed
Tightening torque	0,6 Nm
Width across flats	SW14
Material contact	Copper alloy
Degree of protection (EN IEC 60529)	IP69K, IP68, IP65

Commercial data

URL Webshop	https://shop.murrelektronik.com/7024-15041-0000000
GTIN	4048879772464
EU-Customs tariff number	85332100
US-Customs tariff number	8533210090
ECLASS-6.0	19070403
ECLASS-6.1	19070403
ECLASS-7.0	19070403
ECLASS-7.1	19070403
ECLASS-8.0	19070403
ECLASS-8.1	19070403
ECLASS-9.0	19070403
ECLASS-9.1	19070403
ECLASS-10.0.1	19070403
ECLASS-10.1	19070403
ECLASS-11.0	19070403
ECLASS-11.1	19070403
ECLASS-12.0	19070403
ECLASS-13.0	19070403
ECLASS-14.0	19070403
ETIM-5.0	EC001855
ETIM-6.0	EC001855
ETIM-7.0	EC001855
ETIM-8.0	EC001855
ETIM-9.0	EC001855
ETIM-10.0	EC001855
customs tariff number	85332100
EAN	4048879772464
Packaging unit	1

Electrical data | Supply

Operating voltage DC max.	30 V
Current operating per contact max.	4 A

Diagnostics

Status indication LED	No
-----------------------	----

Installation | Connection

Tightening torque	0,6 Nm
Mounting set	M12 x 1

Device protection | Electrical

Additional condition protection degree	inserted, screwed
Pollution Degree	3
Rated surge voltage	0,8 kV
Material group (IEC 60664-1)	I

Mechanical data | Material data

The information in this Product-PDF has been compiled with the utmost care.
 Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-27

housing	PP
Coating contact	gold plated
Locking material	Stainless steel 1.4404 (V4A)
Mechanical data Mounting data	
Mounting method	inserted, screwed, Shaking protection
Environmental characteristics Climatic	
Operating temperature min.	-30 °C
Operating temperature max.	105 °C