MICO FUSE 24 LED FUSE HOLDER 5X20MM 8 CHANNELS

IN: 24 V DC OUT: 24 V / 6 A


Art.No.: 9000-41078-0600001
Weight: 0.150 kg
Country of origin: CZ
Model designation: MICO FUSE 24 LED


MICO FUSE 24 LED
8 channels
Total current: max. 40 A

Link to Product

Illustration



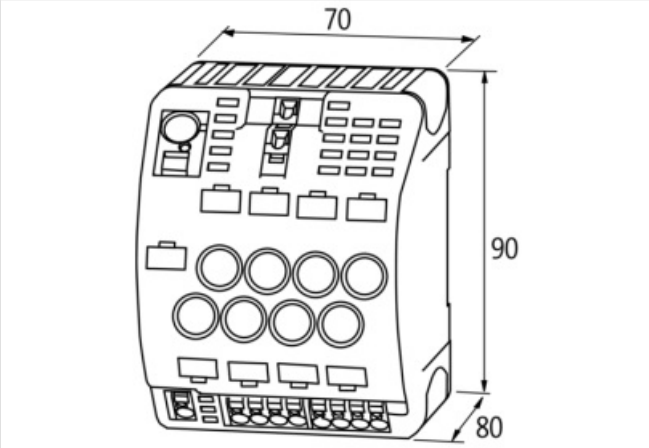

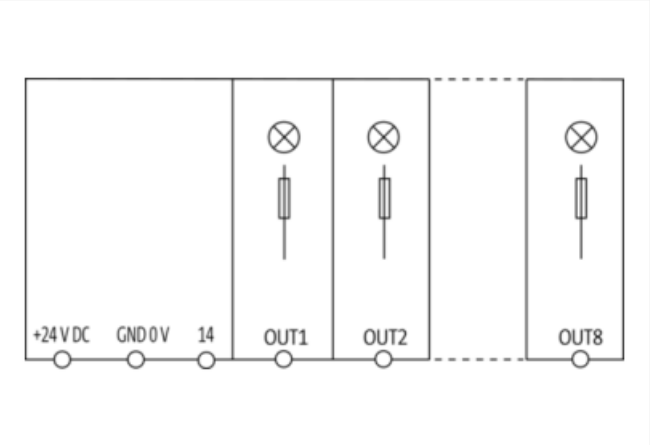

Product may differ from Image

Commercial data

URL Webshop	https://shop.murrelektronik.com/9000-41078-0600001
GTIN	4048879335263
EU-Customs tariff number	85363030
US-Customs tariff number	8536308000

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-27

ECLASS-6.0	27371802
ECLASS-6.1	27142107
ECLASS-7.0	27371802
ECLASS-7.1	27371802
ECLASS-8.0	27371802
ECLASS-8.1	27371802
ECLASS-9.0	27371802
ECLASS-9.1	27371802
ECLASS-10.0.1	27371802
ECLASS-10.1	27371802
ECLASS-11.0	27371802
ECLASS-11.1	27371802
ECLASS-12.0	27371802
ECLASS-13.0	27371802
ECLASS-14.0	27371802
ETIM-5.0	EC001440
ETIM-6.0	EC001440
ETIM-7.0	EC001440
ETIM-8.0	EC001440
ETIM-9.0	EC001440
ETIM-10.0	EC001440
customs tariff number	85363030
EAN	4048879335263
Packaging unit	1
Electrical data | Supply	
Operating voltage DC	24 V
Operating voltage DC min.	18 V
Operating voltage DC max.	30 V
Operating current max.	6 A
Total current max.	40 A
Electrical data | Output	
Switching current max.	20 mA
Installation	
Connection cross-section inputs max.	16 mm²
Connection cross-section outputs min.	0,5 mm²
Connection cross-section outputs max.	4 mm²
Connection cross-section control inputs / control outputs max.	2,5 mm²
Mechanical data | Mounting data	
Height	90 mm
Width	70 mm
Depth	80 mm
Mounting method	geschnappt
Suitable for mounting type	Mounting rail TH35, (EN 60715)
Environmental characteristics | Climatic	
Operating temperature min.	-25 °C
Operating temperature max.	55 °C
Derating	40 °C
Connection type 5	
Family construction form	terminal
No. of poles	1
Gender	female

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-27

Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	24 V DC
Family construction form	terminal
No. of poles	1
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	0 V
Family construction form	terminal
No. of poles	2
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	n.c.
PIN 2	14
Family construction form	terminal
No. of poles	4
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	Out 1
PIN 2	Out 2
PIN 3	Out 3
PIN 4	Out 4
Family construction form	terminal
No. of poles	4
Gender	female
Color contact carrier	green
Connection	Spring clamp terminals FK
PIN 1	Out 5
PIN 2	Out 6
PIN 3	Out 7
PIN 4	Out 8

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2026-08-27