

Mini Horns Sirens Buzzer / EvoSIGNAL

# Mini Sounder contin/pulse 24VAC/DC GY



|           |                |
|-----------|----------------|
| Part No.: | 160.700.75     |
| Series:   | EvoSIGNAL Mini |



## MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 85 mm                       |
| Diameter                     | 62 mm                       |
| Materials                    | PC<br>PC/ABS                |
| Housing colour               | Grey                        |
| Protection category          | IP66                        |
| Connection                   | Push-in terminal            |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Acoustic service life        | 5,000 h minimum             |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +60°C                       |
| UL Type Rating               | Type 12                     |
| Weight with packaging        | 100 g                       |
| Product weight               | 78 g                        |

## ELECTRICAL DATA

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 40 mA              |
| Rated inrush current        | 1600 mA            |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |
| Overvoltage category        | III                |

## ACUSTICAL DATA

|                               |                               |
|-------------------------------|-------------------------------|
| Volume/dB(max) at 1m distance | 95,0 dB (A)                   |
| Acoustic signal image         | Continuous tone<br>Pulse tone |
| Number of tones               | 2 tone                        |
| Audio frequency               | 4000 Hz                       |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Mini Horns Sirens Buzzer / EvoSIGNAL

**Mini Sounder contin/pulse 24VAC/DC GY**

DRAWING

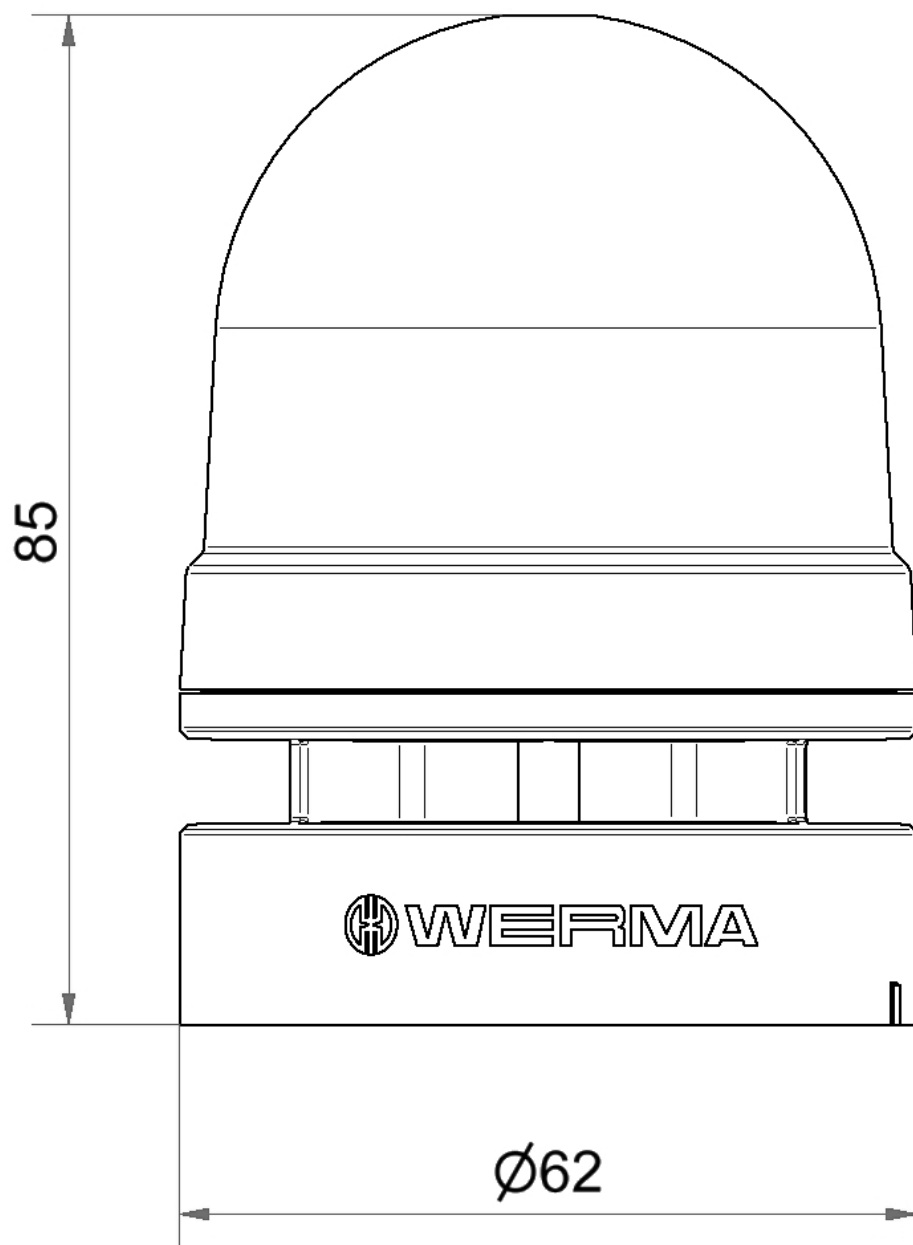

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.