

KombiSIGN 71 / WIN

KombiSIGN 71 reflect 24V BK



Part No.:	861.640.01
Series:	KombiSIGN 71



MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Connection	USB
Tension relief	Not present
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	213 g
Product weight	178 g

ELECTRICAL DATA


Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	900 mA
Rated inrush current	430 mA
Protection class	Protection class 2
Pollution degree	3
Request to external PSU	SELV/PELV

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / WIN

KombiSIGN 71 reflect 24V BK

DRAWING

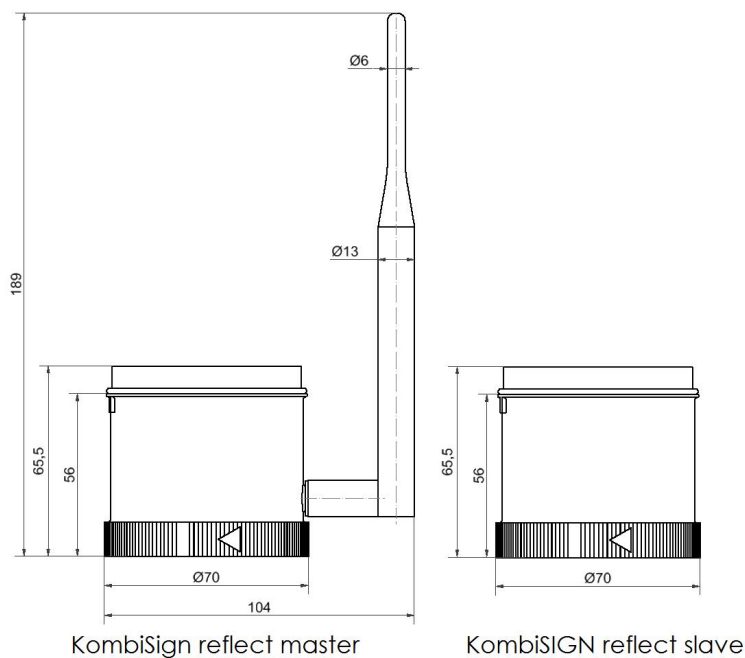

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.