

Insaver HE Topper LED 150 PIR

INSAVER 150 HE TOPPER LED NW PIR

3033921



Product features

- Insaver HE Topper is a ceiling recessed LED downlight with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, Non dimmable LED driver, 8W, 800lm, 100lm/W, 4000K, shallow recessed depth of 55mm.



PRODUCT OVERVIEW

Product name	INSAVER 150 HE TOPPER LED NW PIR
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4271109
E-number SE	7467414
Warranty	3 years
Fixture luminous flux (lm)	800
Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	64
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
Control gear type	Electronic ballast
Dimming method	N/A
Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971339212

DATA TABLE

General data

Product name	INSAVER 150 HE TOPPER LED NW PIR
--------------	----------------------------------

Insaver HE Topper LED 150 PIR

INSAVER 150 HE TOPPER LED NW PIR

3033921

Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4271109
E-number SE	7467414
Warranty	3 years

Optical data

Fixture luminous flux (lm)	800
Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Beam Angle (°)	64
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	8
Mains voltage (V)	220-240V
Electrical protection	Class II
Control gear type	Electronic ballast
Transformer required	Yes
Dimming method	N/A
Drive current (mA)	350
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E

Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B20	90000
Lifespan L90 B10	39000

Physical data

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	Other
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	165
Cutout Dimensions (W x L in mm or Diameter in mm)	145 x 145

Insaver HE Topper LED 150 PIR



INSAVER 150 HE TOPPER LED NW PIR
3033921

Weight (kg) 0.7

Packaging

Single packaging type	Carton
Product EAN number	8711971339212
Packaging single length / height (cm)	25.0
Packaging single width (cm)	17.0
Packaging single depth (cm)	14.0
DUN14 (outer)	18711971339219
Units per outer package	12
Packaging outer length / height (cm)	78.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	31.0

PHOTOMETRY

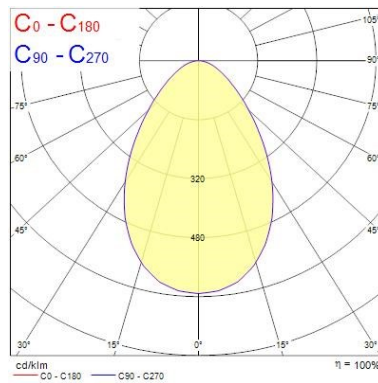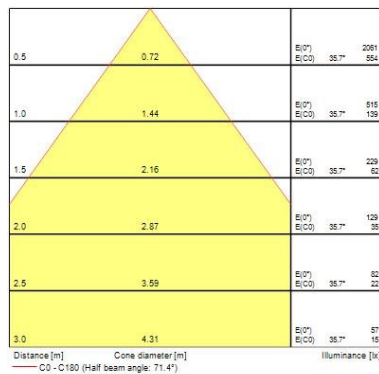

TECHNICAL DRAWINGS

