

Start Surface IP66 Ø300mm Sensor Dim

START SURFACE IP66 1100LM 840 IK10 MW SENS BLK
0049289



Product features

- Sensor Dim LED exterior surface mounted luminaire, 1100lm, 12W power consumption, 92lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), black housnig, vandal resistant, supplied with anti-theft screws




PRODUCT OVERVIEW

Product name	START SURFACE IP66 1100LM 840 IK10 MW SENS BLK
Technology	LED
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4274703
E-number SE	7505133
Warranty	5 years
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	Yes
LED Flickering Rate	High (>40%)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492896

PHOTOMETRY

Start Surface IP66 Ø300mm Sensor Dim
START SURFACE IP66 1100LM 840 IK10 MW SENS BLK
0049289

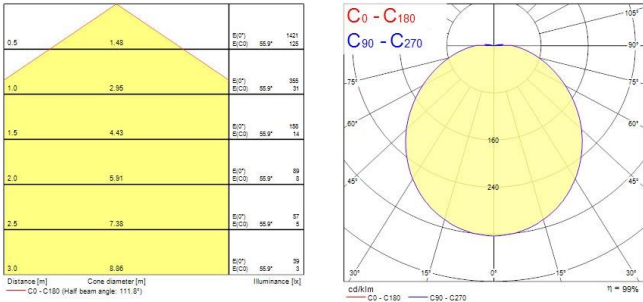

TECHNICAL DRAWINGS

