


Start Surface IP66 Ø350mm Sensor Dim
START SURFACE IP66 1500LM 840 MW SENS EM3 IK10 WHT
0049013



Product features

- Sensor Dim LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, can be adjusted down to 1450lm by internal switch, 14W max. power consumption, 107lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), whitehousing, vandal resistant. Integrated Microwave occupancy sensor with daylight harvest, dimming and corridor function. Integrated emergency, 3 hours, supplied with anti-theft screws

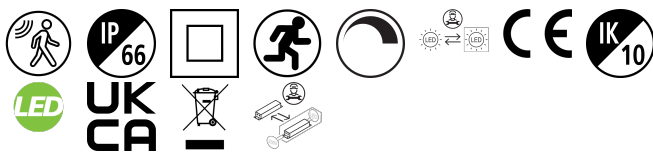


PRODUCT OVERVIEW

Product name	START SURFACE IP66 1500LM 840 MW SENS EM3 IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	124
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	Other
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490137

Start Surface IP66 Ø350mm Sensor Dim
START SURFACE IP66 1500LM 840 MW SENS EM3 IK10 WHT
0049013

PHOTOMETRY

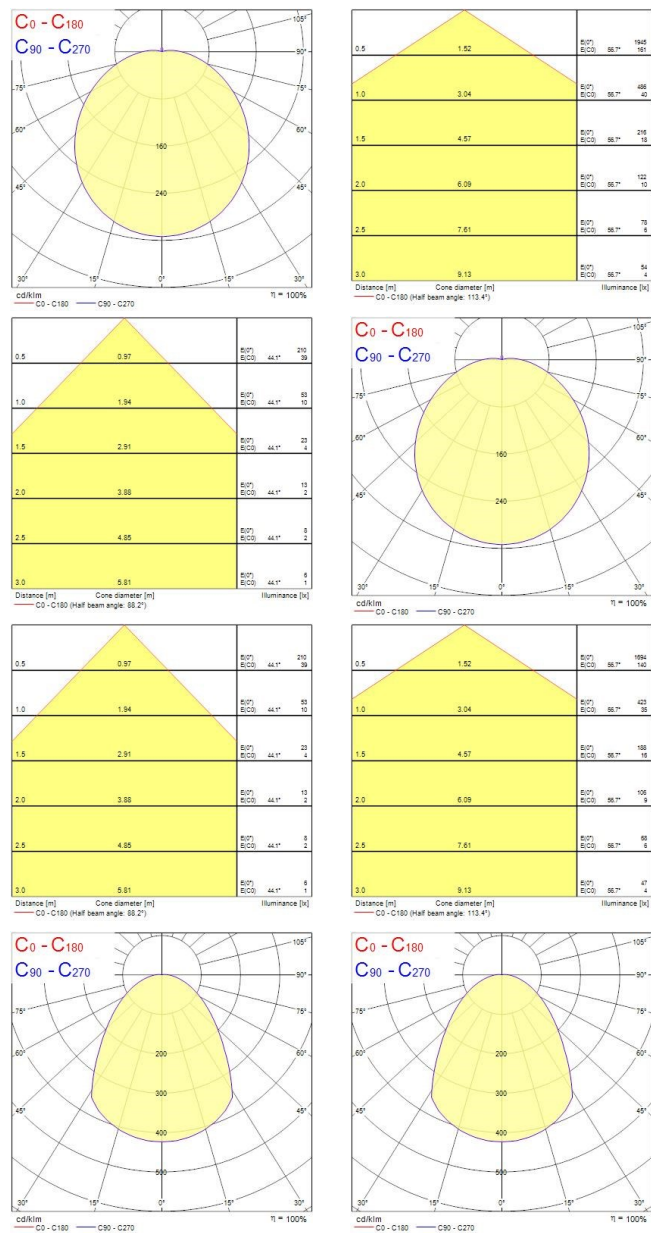

TECHNICAL DRAWINGS

Start Surface IP66 Ø350mm Sensor Dim

START SURFACE IP66 1500LM 840 MW SENS EM3 IK10 WHT

0049013

