

Start Surface IP66 Ø300mm Sensor Dim


START SURFACE IP66 1050LM 830 IK10 MW SENS BLK

0049288



Product features

- Sensor Dim LED exterior surface mounted luminaire, 1050lm, 12W power consumption, 88lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), black housing, vandal resistant, supplied with anti-theft screws

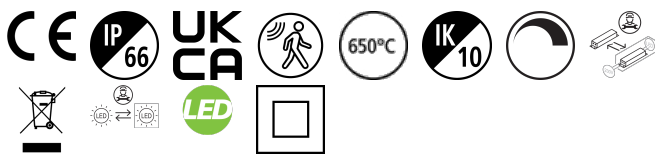


PRODUCT OVERVIEW

Product name	START SURFACE IP66 1050LM 830 IK10 MW SENS BLK
Technology	LED
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4274702
E-number SE	7505132
Warranty	5 years
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	Yes
LED Flickering Rate	High (>40%)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492889

PHOTOMETRY

Start Surface IP66 Ø300mm Sensor Dim
START SURFACE IP66 1050LM 830 IK10 MW SENS BLK
0049288

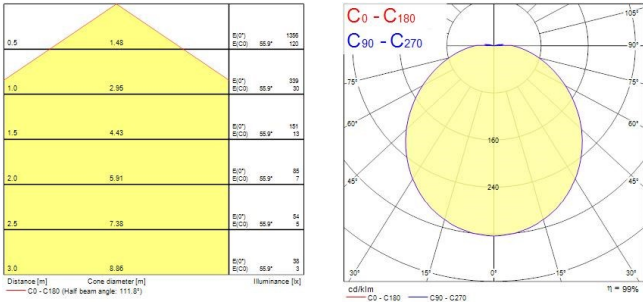

TECHNICAL DRAWINGS

