


Start Surface IP66 Ø350mm Sensor Dim  
START SURFACE IP66 1500LM 840 MW SENS IK10 WHT  
0049005



Product features

- Sensor Dim LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, can be adjusted down to 1450lm by internal switch, 14W max. power consumption, 107lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), whitehousing, vandal resistant. Integrated Microwave occupancy sensor with daylight harvest, dimming and corridor function, supplied with anti-theft screws

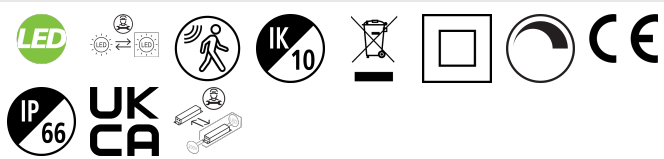


PRODUCT OVERVIEW

|                                 |                                                |
|---------------------------------|------------------------------------------------|
| Product name                    | START SURFACE IP66 1500LM 840 MW SENS IK10 WHT |
| Technology                      | LED                                            |
| Cap/Base                        | N/A                                            |
| Housing                         | PC Polycarbonate                               |
| Mount                           | Ceiling surface mounting                       |
| Environment                     | Indoor, Outdoor                                |
| General application             | Hospitality                                    |
| ETIM Class                      | EC002892                                       |
| Warranty                        | 5 years                                        |
| Fixture luminous flux (lm)      | 1500                                           |
| Luminaire efficacy (lm/W)       | 107                                            |
| LOR (%)                         | 100                                            |
| Colour temperature (K)          | 4000                                           |
| Colour Code                     | 840                                            |
| Light colour                    | Neutral White                                  |
| CRI (Ra)                        | 80                                             |
| Colour Variation Initial (SDCM) | SDCM6                                          |
| Beam Angle (°)                  | 120                                            |
| Glare control                   | < 25                                           |
| Photobiological Risk Group      | RG0                                            |
| Total power consumption (W)     | 14                                             |
| Electrical protection           | Class II                                       |
| Control gear type               | LED driver constant current                    |
| Control gear mounting           | Integrated                                     |
| Dimmable                        | Yes                                            |
| Dimming method                  | Other                                          |
| LED Flickering Rate             | Ultra low (5% or less)                         |
| Housing colour                  | RAL 9003 - Signal white                        |
| IP rating                       | IP66                                           |
| IK rating                       | IK10                                           |
| Product EAN number              | 5410288490052                                  |

Start Surface IP66 Ø350mm Sensor Dim  
START SURFACE IP66 1500LM 840 MW SENS IK10 WHT  
0049005

PHOTOMETRY

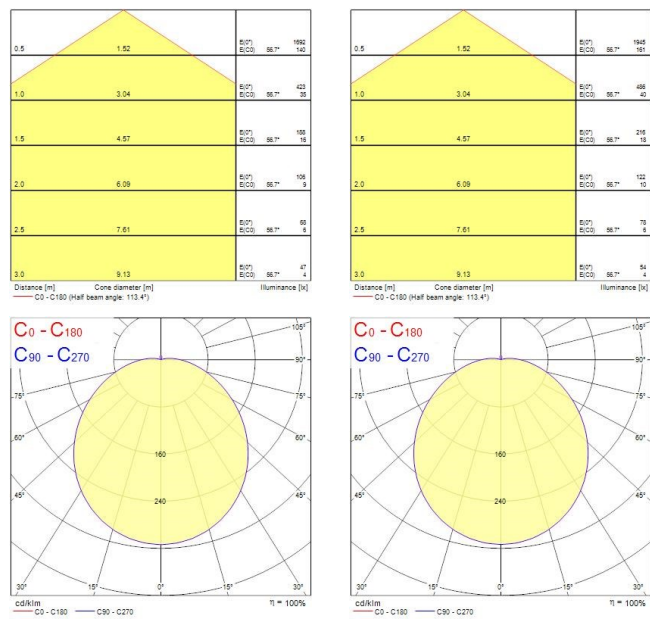

TECHNICAL DRAWINGS

