

RANA LED S 600 HO 4K LOUV+PRI 1-10 W GEN2  
0051471



Features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 616x616x50mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x285mm, 1-10V Dimmable, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4500lm, 40W, 113lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.


Product Overview

|                                 |                                           |
|---------------------------------|-------------------------------------------|
| Product name                    | RANA LED S 600 HO 4K LOUV+PRI 1-10 W GEN2 |
| Technology                      | LED                                       |
| Cap/Base                        | N/A                                       |
| Housing                         | Steel                                     |
| Mount                           | Ceiling surface mounting, Suspended       |
| General application             | Office, Hospitality, Retail, Education    |
| ETIM Class                      | EC002892                                  |
| E-number FI                     | 4273530                                   |
| Fixture luminous flux (lm)      | 4500                                      |
| Luminous flux (lm)              | 4500                                      |
| Luminaire efficacy (lm/W)       | 113                                       |
| Colour temperature (K)          | 4000                                      |
| Light colour                    | Neutral White                             |
| CRI (Ra)                        | 80                                        |
| Colour Variation Initial (SDCM) | 3                                         |
| Glare control                   | < 19                                      |
| Photobiological Risk Group      | RG0                                       |
| Total power consumption (W)     | 40                                        |
| Electrical protection           | Class I                                   |

**RANA LED S 600 HO 4K LOUV+PRI 1-10 W GEN2**  
**0051471**

|                           |                  |
|---------------------------|------------------|
| Control gear type         | Other            |
| Dimmable                  | Yes              |
| Minimum dimming level (%) | 10               |
| Housing colour            | White            |
| IP rating                 | IP20             |
| IK rating                 | IK07             |
| Product EAN number        | 5410288514710    |
| Warranty                  | 5 years          |
| Dimming method            | 1-10V (Analogue) |

## Photometry

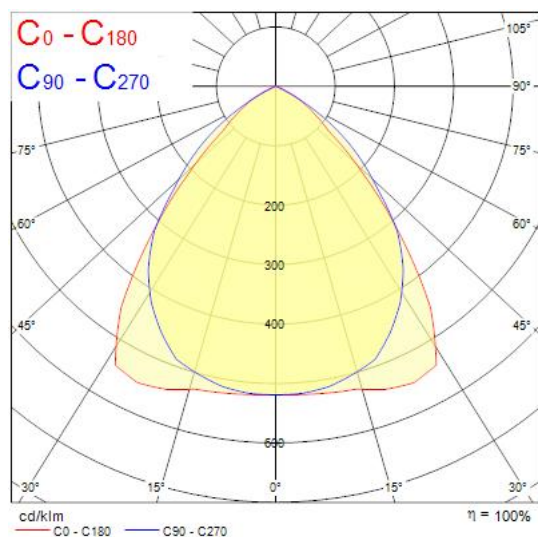

## Technical drawings

