

RANA LED S 600 HO 4K LOUV+PRI W GEN2  
0051469



Features

- Surface or Suspended LED Linear luminaire with Louvre + Prismatic Optic, Direct Light Distribution, Luminaire Dimensions: 616x616x50mm, Sylvania White body colour, IP20, IK07, Light Engine Dimensions: 570x285mm, Constant Current, Low LED flicker (+/-5%), Neutral White (4000K) LED Colour Temperature, 4500lm, 40W, 113lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, UGR<19, Luminance at 65° < 3000 cd/m2, Lumen Maintenance: L90B10 at 50,000 hours, Quick electrical connection with push-connectors in the luminaire, Glow Wire Test 850°C.


Product Overview

|                                 |                                        |
|---------------------------------|----------------------------------------|
| Product name                    | RANA LED S 600 HO 4K LOUV+PRI W GEN2   |
| Technology                      | LED                                    |
| Cap/Base                        | N/A                                    |
| Housing                         | Steel                                  |
| Mount                           | Ceiling surface mounting, Suspended    |
| General application             | Education, Hospitality, Office, Retail |
| ETIM Class                      | EC002892                               |
| E-number FI                     | 4273524                                |
| Fixture luminous flux (lm)      | 4500                                   |
| Luminous flux (lm)              | 4500                                   |
| Luminaire efficacy (lm/W)       | 113                                    |
| Colour temperature (K)          | 4000                                   |
| Light colour                    | Neutral White                          |
| CRI (Ra)                        | 80                                     |
| Colour Variation Initial (SDCM) | 3                                      |
| Glare control                   | < 19                                   |
| Photobiological Risk Group      | RG0                                    |
| Total power consumption (W)     | 40                                     |
| Electrical protection           | Class I                                |

**RANA LED S 600 HO 4K LOUV+PRI W GEN2**  
**0051469**

|                    |                             |
|--------------------|-----------------------------|
| Control gear type  | LED driver constant current |
| Dimmable           | No                          |
| Housing colour     | White                       |
| IP rating          | IP20                        |
| IK rating          | IK07                        |
| Product EAN number | 5410288514697               |
| Warranty           | 5 years                     |

## Photometry

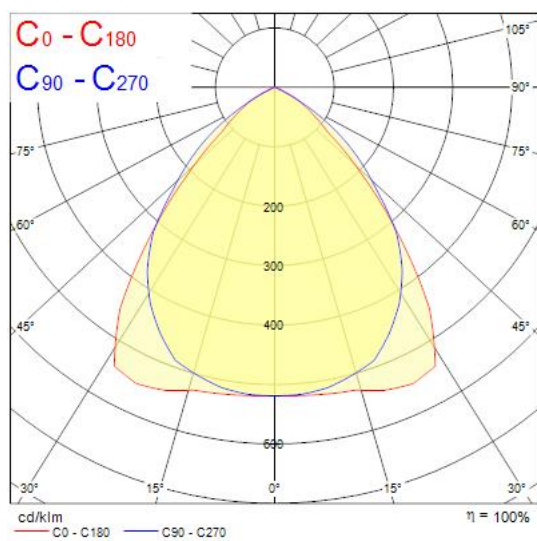

## Technical drawings

