

START SURFACE IP66 1250LM 840 IK10 BLK
0049927



Features

- LED exterior surface mounted luminaire, 1250lm, 12W power consumption, 104lm/W efficacy, 4000K color temperature, CRI80, non-dimmable, IP66, IK10, 90,000 hours (L70B50) Lifespan, black housing, vandal resistant, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 1250LM 840 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579598
Fixture luminous flux (lm)	1250
Luminaire efficacy (lm/W)	105
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Housing colour	RAL 9011 - Graphite black
IP rating	IP66

START SURFACE IP66 1250LM 840 IK10 BLK 0049927

IK rating	IK10
Product EAN number	5410288499277
Warranty	5 years
Dimming method	N/A

Photometry

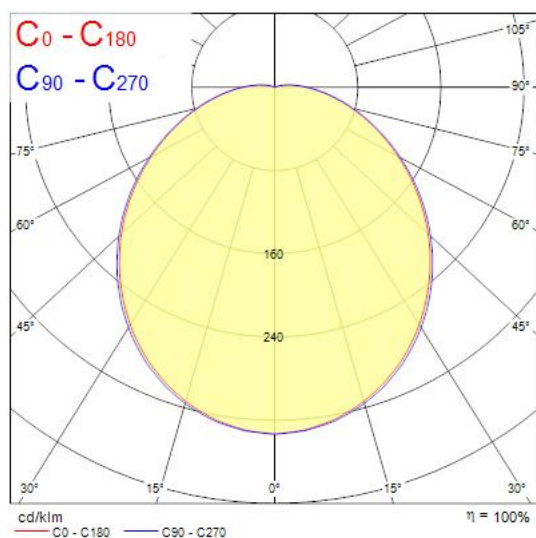

Technical drawings

