



Features

- Sensor Dim LED exterior surface mounted luminaire, 1050lm, 12W power consumption, 88lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), black housing, vandal resistant, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 1050LM 830 IK10 MW SENS BLK
Technology	LED
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4274702
E-number SE	7505132
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	Yes

START SURFACE IP66 1050LM 830 IK10 MW SENS BLK
0049288

LED Flickering Rate	High (>40%)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492889
Warranty	5 years
Colour Code	830

Photometry

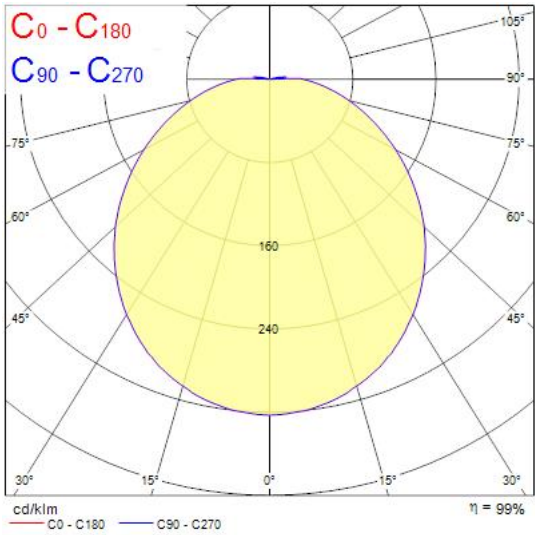

Technical drawings

