

Midi / EvoSIGNAL

# Midi TwinLIGHT Combi 12/24VAC/DC YE



|           |                |
|-----------|----------------|
| Part No.: | 461.310.70     |
| Series:   | EvoSIGNAL Midi |



## MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 130 mm                      |
| Diameter                     | 85 mm                       |
| Materials                    | PC<br>PC/ABS                |
| Dome colour                  | Yellow                      |
| Housing colour               | Grey                        |
| Protection category          | IP66                        |
| Connection                   | Push-in terminal            |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +60°C                       |
| Weight with packaging        | 286 g                       |
| Product weight               | 186 g                       |

## ELECTRICAL DATA

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 12V<br>24V         |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 12 VDC             |
| Rated operational current   | 290 mA             |
| Rated inrush current        | 2,5A               |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |
| Overvoltage category        | III                |

## OPTICAL DATA

|                              |                                 |
|------------------------------|---------------------------------|
| Light source                 | LED                             |
| Light colour                 | Yellow                          |
| Optical signal image         | Blink<br>Permanent<br>TwinLight |
| Blink frequency (Hz)         | 1 Hz                            |
| Service life optical         | 50,000 h minimum                |
| Pulse- & pause Duration [ms] | 466ON, 557OFF                   |

## ACUSTICAL DATA

|                             |              |
|-----------------------------|--------------|
| Volume (max) at 1m distance | 110,0 dB (A) |
|-----------------------------|--------------|



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi / EvoSIGNAL

## Midi TwinLIGHT Combi 12/24VAC/DC YE

|                       |                 |
|-----------------------|-----------------|
| Acoustic signal image | Multi-tone      |
| Number of tones       | 10 tone         |
| Audio frequency       | 3300 Hz         |
| Acoustic service life | 5,000 h minimum |


| APPROVAL DATA               |         |
|-----------------------------|---------|
| Conforms with CE            | yes     |
| WEEE                        | yes     |
| Conform with ATEX-directive | no      |
| Conforms with CCC           | no      |
| Conforms with UL            | cULus   |
| UL Type Rating              | Type 12 |
| Conforms with FCC           | no      |
| Conforms with IC            | No      |
| EAC Zertifikat vorhanden    | yes     |
| Conforms with AS-I          | no      |
| ICAO Certification          | No      |
| Conforms with GL            | no      |
| Conforms with RoHS CN       | no      |
| Conforms with VdS           | no      |

 For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi / EvoSIGNAL

**Midi TwinLIGHT Combi 12/24VAC/DC YE**

DRAWING

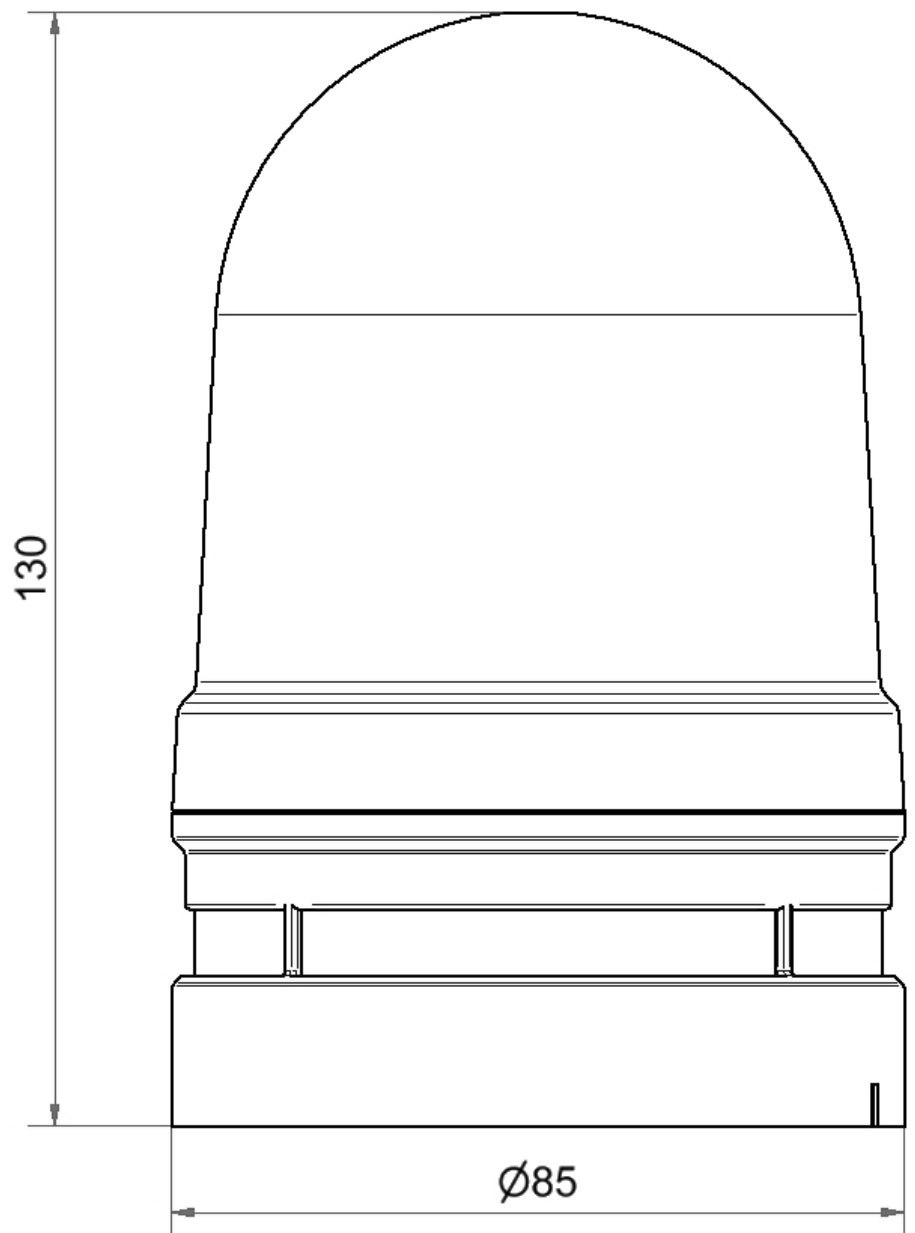

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.