Maxi free-standing Beacons / EvoSIGNAL

Maxi TwinLIGHT 12/24VAC/DC BU



Part No.:	**262.510.70**
Series:	**EvoSIGNAL Maxi**

MECHANICAL DATA	
Height	173 mm
Diameter	120 mm
Materials	PC PC/ABS
Dome colour	Blue
Housing colour	Grey
Protection category	IP66
Connection	Push-in terminal
cross-sectional area minimum	0,25mm² / 24AWG
cross-sectional area maximum	1,50mm² / 16AWG
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	505 g
Product weight	348 g

ELECTRICAL DATA	
Operating voltage	12V 24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	700 mA
Rated inrush current	<1800 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	III

OPTICAL DATA	
Light source	LED
Light colour	Blue
Optical signal image	Blink Permanent TwinLight
Blink frequency (Hz)	1 Hz
Service life optical	50,000 h minimum
Pulse- & pause Duration [ms]	484ON, 480OFF

APPROVAL DATA	
Conforms with CE	yes


! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Maxi free-standing Beacons / EvoSIGNAL

Maxi TwinLIGHT 12/24VAC/DC BU

WEEE	yes
Conform with ATEX-directive	no
Conforms with CCC	no
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	no
Conforms with IC	No
EAC Zertifikat vorhanden	yes
Conforms with AS-I	no
ICAO Certification	No
Conforms with GL	no
Conforms with RoHS CN	no
Conforms with VdS	no

DRAWING

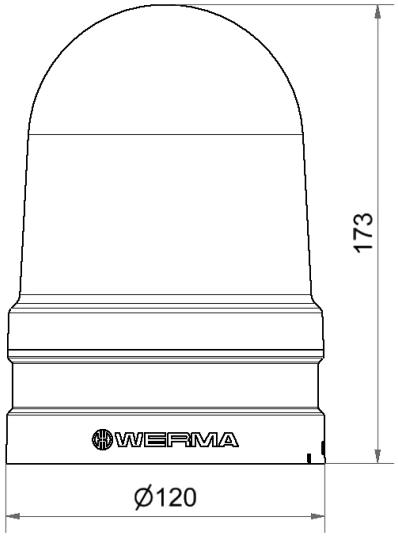

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.